

# PREMIUM HOSES, TOOLS & EQUIPMENT



If it's not ZillaGreen, it's not Flexzilla®

2022



### Giving you the edge you deserve.

You work hard to get where you are in life. When it's time to choose the tools that help get you there, you deserve something that's above the ordinary. Tools that give you the edge you need to complete your projects faster, easier and with more satisfaction at the end of the day. You deserve Flexzilla hoses, tools and equipment.

# It's the difference between ordinary tools and the innovative thinking designed into every Flexzilla product.

We take conventional tool ideas and rethink the work experience. The result is premium air, water and power tools that pull their weight and always put you a step ahead.

### **Experience it for yourself.**

See how the innovative details we put into our tools make all the difference. Whether you're a professional or do-ityourselfer, working with Flexzilla tools doesn't feel like work.



# CONTENTS



7	Air Compressors	
	Stationary Air Compressors - Pressure Lubricated	Air Compressor Accessories
13	Air Hoses	
	Air Hose Assemblies       14         Air Hose Kits       15-16         Whip Hose Assemblies       16         Polyurethane Recoil Hose       17         Hose Crimper       17         Pro Custom Air Hose       18	Pro Custom Hose Centers19-20Pro Reusable Fittings and Splicers21Bulk Air and Water Hose21Pro Air Hose Assemblies22Pro Air Hose Kits23Pro Custom Length Whip Hose with High Flow Ball Swivel23
24	Air Hose Reels	
	Retractable Air Hose Reels with Levelwind™ Technology	Retractable Air Hose Reels - Single Arm, Open Face
35	Air Line Accessories	
	Pro High Flow Couplers and Plugs       36-37         Pro High Flow Coupler and Plug Kits       38	Pro Heavy Duty Safety Couplers and Plugs
41	Blow Guns	
	Modular Blow Guns	Modular Blow Guns Accessories System
44	Air Tools	
	Pro Mini Impact Wrench	
46	Tire Maintenance	
	Tire Inflators	Truck Tire Inflator Kit



Water Hoses	
SwivelGrip® Garden and Lead-in Hose Assemblies 49	Garden Hose Nozzles
Garden Hose Merchandiser and Pallets 50	Lawn Sprinklers
Colors™ SwivelGrip Garden Hose Assemblies 50	Pro Water Hose Nozzles57
Garden and Lead-in Hose Assemblies	Pro Custom Water Hose58
Garden Hose Kit with Quick Connect Attachments	Pro Custom Water Hose Centers
3-Piece Nozzle Kit with Quick Connections52	Pro Water Hose Assemblies 60
Quick-Connect Garden Hose Fittings	Retractable Water Hose Reel with Levelwind Technology61
Marine Twin Outboard Flush Kit, 6-Piece	Mounting Brackets
2-Way Hose Splitter	Pressure Washer Hose Assemblies 62



### 



<b>Greasing Equipment</b>		6
20V Cordless Grease Gun Kit	Quick-Release Grease Coupler	
Lever Action Grease Gun	Grease Hoses	



Work Gloves	7	1
Work Gloves 72-87		

Plan-O-Grams & Part Number Inc	dex	88
Plan-O-Grams	Part Number Index	

### ICONS THROUGHOUT THE CATALOG IDENTIFY FLEXZILLA® FEATURES AND BENEFITS



### Flexzilla® Air Hose

#### **FEATURES:**

- · Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat no memory
- · Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
  Includes bend restrictors to reduce wear
- and tear, prolonging the life of the hose



### Flexzilla® Water Hose

#### **FEATURES:**

- Extreme all-weather flexibility
- · Durable outer cover resists abrasion, UV and mold
- Won't kink under pressure
- · Lightweight and easy to handle
- · Lays flat no memory
- · Reinforced mid-layering provides extra strength
- Anodized aircraft aluminum ends
- Leak-free connections A durable O-ring provides long lasting leak-free connections
- Max. working pressure at 70°F: 150 psi



### ColorConnex® Couplers & Plugs

ColorConnex is a patented system that allows color-to-color matching of couplers and plugs among the standard pneumatic interchanges.

- Industrial (Type D): RedAutomotive (Type C): BlueARO (Type B): Green

By using ColorConnex to dedicate line use, you can ensure you never use a lubricated line for a dry line application, preventing cross contamination.

- · Match coupler and plug types
- · Dedicate hose applications



### Flexzilla® Pro Air Hose

### **FEATURES:**

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressureLightweight and easy to handle
- · Lays flat no memory
- Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose



### Flexzilla® Pro Water Hose

### **FEATURES:**

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility
- Lightweight, coils easilyWon't kink under pressure
- Lays flat no memory
- Durable outer cover resists abrasion, UV and mold
- · Reinforced mid-layering provides extra strength
- · Leak free connections A durable O-ring provides long lasting leak free connections
- Max. working pressure at 70°F: 150 psi
  Flexzilla Pro Reusable Fittings include bend reinforcement for increased flexibility. Reduces wear and tear, prolonging the life of the hose.



### Flexzilla® Pro High Flow **Couplers and Plugs**

Flexzilla Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. Don't Starve Your Air Tool!

- Push-To-Connect
- Increased efficiency
- Maximum Torque
- Maximum RPM
- Best Performance
- · Ideal for spray guns and impact tools

### Flexzilla® Pro

Flexzilla Pro Products are designed with the professional in mind



### **Drinking Water Safe**

The Flexible Hybrid Polymer inner tube material makes many of our hoses drinking water safe







# **QUIET TECHNOLOGY™**

Quiet Technology™, which uses large, low-RPM pumps and motors to reduce high frequency noise levels while increasing CFM output.



# 

# SILENCER™ NOISE SUPPRESSION

A patented noise suppression system that uses baffles to reduce low frequency noise.

FLEXZILL





# **Stationary Air Compressors - Pressure Lubricated**

PRO

Let's face it, standard air compressors are LOUD. All this NOISE interferes with workplace communication, lowers productivity on the job, and increases risk of hearing loss. Fortunately, Flexzilla® brings quiet back to the workplace.

# QUIET TECHNOLOGY™

- Flexzilla air compressors are the quietest on the market, emitting operating noise no louder than a normal conversation
- Flexzilla air compressors feature low RPM pumps and motors that reduce high frequency noise levels while increasing CFM output

# SILENCER

Flexzilla stationary air compressors include the Silencer,™
 a patented noise suppression system that reduces low
 frequency noise levels

### **INDUSTRY EXCLUSIVE!**


### 10 HP RECIPROCATING UNIT / 1-PHASE

- High CFM performance without the cost of installing 3-Phase
- Output of more expensive screw units without the added cost















# **Stationary Air Compressors - Pressure Lubricated**





### FLEXZILLA® PRO (5 HP) INCLUDES:

- Manual water drain
- Motor open drip proof (ODP)
  4 Year Warranty
  1 Year Parts and Labor Warranty

- Additional 3 Year Extended Parts Warranty





# FLEXZILLA® PRO (7.5 / 10 HP) INCLUDE: • Cool Flow Technology™

- Timed water drain
- Belt tensioner
- Continuous run (Dual control)
- Totally enclosed fan cooled motor
- Magnetic starter prewiredBall valve crank case oil drain

- 6 Year Warranty
  1 Year Parts and Labor Warranty
  Additional 5 Year Extended Parts Warranty

Part No.	HP Spec	Tank Size (Gal.)	CFM @ 90 PSI	Max. PSI	Pump	Connection	Pump Pressure Lubed	Automatic Tank Drain	Belt Tensioner	Continuous Run	Cool Flow Technology™	Length (in.)	Width (in.)	Height (in.)	Assembled in USA	Tank Made in USA
Flexzilla® Pro Statio	nary A	ir Comp	ressor	s, 5 HF	,											
FS05V080I1	5	80	19	175	2-Cyl	1-Phase	•					42	33	75	•	•
Flexzilla® Pro Statio	nary A	ir Comp	ressor	s, 7.5	HP											
FXS07V080V1	7.5	80	33	175	4-Cyl	1-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS07V080V3-208	7.5	80	33	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5		
FXS07V080V3-230	7.5	80	33	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5	•	•
Flexzilla® Pro Statio	nary A	ir Comp	ressor	s, 10 H	IP											
FXS10V080V1	10	80	39	175	4-Cyl	1-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS10V080V3-208	10	80	39	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5		
FXS10V080V3-230	10	80	39	175	4-Cyl	3-Phase	•	•	•	•	•	38	42	72.5	•	•
FXS10V120V1	10	120	39	175	4-Cyl	1-Phase	•	•	•	•	•	41	43	78	•	•
FXS10V120V3-208	10	120	39	175	4-Cyl	3-Phase	•	•	•	•	•	41	43	78	•	•
FXS10V120V3-230	10	120	39	175	4-Cyl	3-Phase	•	•	•	•	•	41	43	78	•	•



# **Stationary Air Compressors - Splash Lubricated**







# FLEXZILLA® (5 / 7.5 / 10 HP) INCLUDE: • Motor - Open drip proof (ODP) • Automatic tank drain

- Heavy Steel OSHA Approved Belt Guards
- 4 Year Warranty1 Year Parts and Labor WarrantyAdditional 3 Year Extended Parts Warranty

### SINGLE PHASE ONLY, 3-PHASE MOTOR IS **NOT AVAILABLE FOR SPLASH UNITS**

Part No.	HP Spec	Tank Size (Gal.)	CFM @ 90 PSI	Max. PSI	Pump	Connection	Pump Splash Lubed	Automatic Tank Drain	Length (in.)	Width (in.)	Height (in.)	Assembled in USA	Tank Made in USA
Flexzilla® Stationary	Air Compre	ssors, 5 HP											
FS050V80Y1	5	80	16	175	2-Cyl	1-Phase	•	•	40	39	69	•	•
Flexzilla® Stationary	Air Compres	ssors, 7.5 HP											
FS07V080Y1	7.5	80	25	175	4-Cyl	1-Phase	•	•	40	40	69	•	•
Flexzilla® Stationary	Air Compres	ssors, 10 HP											
FS10V080V1	10	80	37	175	4-Cyl	1-Phase	•	•	38	43	73	•	•
FS10V120V1	10	80	37	175	4-Cyl	3-Phase	•	•	47	44	79	•	•



## **Refrigerated Air Dryers**

PRO

Flexzilla<sup>™</sup> Pro Refrigerated Air Dryers continuously chill the compressed air from your compressors to condense and remove moisture, leaving only powerful, compressed air your pneumatic tools require for best performance.

### **FEATURES:**

- Premium Industrial Refrigerated Air Dryer
  - Chills the air to condense and remove moisture; runs on 115 Volt, single phase
  - 230 PSI max.; Max. inlet temp: 140°F; 37°F 50°F dew point
  - Maximum ambient temperature: 122°F; for use with compressors that do not have aftercoolers
- 5 Micron Pre-Filter Removes larger dust and dirt particles from the air supply so the dryer can work more efficiently
- 1 Micron Active Coalescing Filter Removes oil and water Particles from the air; cleaner, drier air improves tool life & project results
- Refrigerated Air Inlet Inner Cooler Trouble-free high temperature cooling for consistent dry air
- Automatic Drain System Eliminates the need for daily maintenance
- Outlet Air Baffle Heater Prevents condensation on outlet air piping
- Side Mounted Condenser and Fan Motor
  - Easy to reach and service through the cabinet doors- no screws to slow you down
  - Uses environmentally friendly 134A refrigerant
- Heavy Duty Steel Cabinet and Safety Shut-Off Valve Meets the demands of industrial use; valve shuts the compressor down if it gets above or below a safe temperature



Part No.	Volt	CFM	HP Spec	Max. PSI	Inlet Fittings	Outlet Fittings
FDRCF1150030	115V	30	5 HP-7.5 HP	230 PSI	1/2 in. NPT	1/2 in. NPT
FDRCF1150058	115V	58	10 HP	230 PSI	1/2 in. NPT	1/2 in. NPT

## **Air Compressor Accessories**

Part No.	Description	Retail Packaging	Assembled in USA
DRAIN013	Flexzilla™ Pro Air Compressor Timed Water Drain	-	-
FILTER057	Flexzilla™ Air Compressors Air Filter for 5-10 HP	-	•
FILTER107KIT	Flexzilla™ Air Compressor Silencer™ Filter Replacements, Qty. 8		
FILTERKIT011	Flexzilla™ Air Dryer Filter Maintenance Kit, for 30 CFM		
FILTERKIT012	Flexzilla™ Air Dryer Filter Maintenance Kit, for 58 CFM		
FKIT011A	Flexzilla™ Air Dryer Filter Maintenance Kit, for 30 CFM	-	-
FKIT026A	Smart Oil™ and Filter Maintenance Kit, 24-Piece, for 5-10 HP Air Compressors	-	-
ISOLATORS001	Flexzilla™ Air Compressors Isolator Pads, Qty. 4	_	-
MAINKIT008A	Flexzilla™ Air Compressors Oil and Filter Maintenance Kit, for 5-10 HP		
OILFZ004	Flexzilla™ Air Compressor Oil, Synthetic, Piston-Type, 1 Qt.	•	•
OILPIS102Q	Smart Oil™ Whisper Blue Air Compressor Oil, Synthetic, 1 Qt.	•	













# **Portable Air Compressors**





Flexzilla® Air Compressors are the quietest on the market, emitting operating noise no louder than a normal conversation. Flexzilla Air Compressors feature low RPM twin cylinder pumps and motors that reduce high frequency noise levels.



### FEATURES:

- Industrial Grade Pump
- Premium components and copper windings that outlast aluminum
- Direct Drive Pump
- Oil-Free Pump
- Reduces Maintenance
- Two Quick-Connect Universal Brass Couplers
- Pressure Regulator and Gauge
- Tank Pressure Gauge
- · Manual Tank Drain
- Elastomeric Ergonomic Grip



### **CF10050F FEATURES:**

• Convenient top mounted controls

### **CB20100F & CB20200F FEATURES:**

- Front mounted controls
- 8 in. oversize wheels for ease of mobility



Part No.	HP Spec	Tank Size	CFM @ 90 PSI	Max. PSI	Pump RPM	Pump	Power Source	Current Draw / Max. Amps	Oil-Free Pump	Direct Drive Pump	Retail Packaging
Flexzilla® Porta	ble Air Con	npressors,	1 HP								
CF10050F	1 HP	5 Gal.	2.5 CFM	125 PSI	1702 RPM	2-Cyl	ELECTRIC	7 AMPS @ 115V	•	•	•
Flexzilla® Porta	ble Air Con	npressors,	2 HP								
CB20100F	2 HP	10 Gal.	5.8 CFM	125 PSI	1740 RPM	2-Cyl	ELECTRIC	14 AMPS @ 115V	•	•	•
CB20200F	2 HP	20 Gal.	5.8 CFM	125 PSI	1740 RPM	2-Cyl	ELECTRIC	14 AMPS @ 115V	•	•	•



# **FLEXIBLE HYBRID POLYMER**

Flexzilla® hoses have a durable, abrasion-resistant outer cover.

# WON'T KINK UNDER PRESSURE

Lightweight and easy to handle, Flexzilla hoses lay flat, have no memory and won't kink under pressure.

# **EXTREME ALL-WEATHER FLEXIBILITY**

Flexzilla hoses offer extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F).



### **Air Hose Assemblies**



Flexzilla® is a revolutionary hose featuring a Flexible Hybrid Polymer material that redefines flexibility. This engineered polymer-blend material permits use in environments where general purpose PVC and rubber hose may become too stiff. Flexzilla hose characteristics offer zero memory allowing it to lay flat. It won't work against you during operation and coils easily after use. Flexzilla offers extreme all-weather flexibility, even in subzero conditions, and is ideal in both hot and cold environments where tight radius bends are needed.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Made in USA
HFZ1425YW2	1/4 in.	25 ft.	1/4 in. MNPT	•	•
HFZ1450YW2	1/4 in.	50 ft.	1/4 in. MNPT	•	•
HFZ14100YW2	1/4 in.	100 ft.	1/4 in. MNPT	•	
HFZ14100YW2-3X	1/4 in.	100 ft.	1/4 in. MNPT	•	•
HFZ3825YW2	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3825YW2-5X	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3835YW2	3/8 in.	35 ft.	1/4 in. MNPT	•	•
HFZ3850YW2	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ3850YW2-3X	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ3850YW2-10X	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ3850YW3	3/8 in.	50 ft.	3/8 in. MNPT	-	•
HFZ38100YW2	3/8 in.	100 ft.	1/4 in. MNPT	•	•
HFZ1225YW3	1/2 in.	25 ft.	3/8 in. MNPT	•	-
HFZ1250YW3	1/2 in.	50 ft.	3/8 in. MNPT	•	-
HFZ1250YW4	1/2 in.	50 ft.	1/2 in. MNPT	-	-
HFZ12100YW3	1/2 in.	100 ft.	3/8 in. MNPT	•	-
HFZ12100YW4	1/2 in.	100 ft.	1/2 in. MNPT	-	-
Part nos with a -3Y -	5X or 10X suffix	include 3 5 or 10	hoca accambline ra	enactivaly in a ratail m	orobandicar dicalay

### **FEATURES:**

- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- · Lightweight and easy to handle
- Lays flat no memory
- · Durable and abrasion-resistant outer cover
- Anodized aircraft aluminum ends
- Max. working pressure at 70°F: 300 psi
- Includes bend restrictors to reduce wear and tear, prolonging the life of the hose









# Air Hose Kits - Include Hose, Coupler, and Plug





This convenient hose kit features the revolutionary Flexzilla® air hose paired with a Red Industrial (Type D) 1/4 in. body ColorConnex® coupler and plug set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the jobsite.



### **KIT INCLUDES:**

- Flexzilla Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- Pre-Sealed Threads





FEATURING:	Use color to:	
GolorGonnex <sup>®</sup> Type d / Industrial	<ul><li>Match coupler &amp; plug types</li><li>Dedicate hose applications</li></ul>	

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZ1425YW2-D	1/4 in.	25 ft.	1/4 in. MNPT	•	•
HFZ1450YW2-D	1/4 in.	50 ft.	1/4 in. MNPT	•	•
HFZ14100YW2-D	1/4 in.	100 ft.	1/4 in. MNPT	•	
HFZ3825YW2-D	3/8 in.	25 ft.	1/4 in. MNPT	•	•
HFZ3835YW2-D	3/8 in.	35 ft.	1/4 in. MNPT	•	
HFZ3850YW2-D	3/8 in.	50 ft.	1/4 in. MNPT	•	•
HFZ38100YW2-D	3/8 in.	100 ft.	1/4 in. MNPT	•	•



# Air Hose Kit - Includes Hose, Blow Gun and Accessories





### 11-Piece Air Compressor Kit

### **KIT INCLUDES:**

- (1) Flexzilla Air Hose, 50 ft. x 3/8 in.(1) Blow Gun with safety tip
- (1) Ball Foot Chuck
- (1) Pencil Tire Pressure Gauge (10 to 100 psi)
  (1) Coupler, 1/4 in. FNPT
- (1) Coupler, 1/4 in. MNPT
- (2) Plugs, 1/4 in. FNPT
- (3) Plugs, 1/4 in. MNPT







Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZCLB11D	3/8 in.	50 ft.	1/4 in. NPT	•	•
HFZCLB11D-3X	3/8 in.	50 ft.	1/4 in. NPT	•	•
P	art no. with a -3X s	suffix include 3 hos	se assemblies in a	retail merchandiser d	isplay

# **Whip Hose Assemblies**



### WHY USE A WHIP HOSE?

- Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- · Increases mobility in tight spaces
- Improves air tool ergonomics





Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging	Assembled in USA
HFZ1405YW2B	1/4 in.	5 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT		•
HFZ3802YW2B	3/8 in.	2 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	•
HFZ3804YW2B	3/8 in.	4 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	•
HFZ3806YW2B	3/8 in.	6 ft.	1/4 in. MNPT Ball Swivel x 1/4 in. FNPT	•	•
HFZ1202YW3S	1/2 in.	2 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT		-
HFZ1204YW3S	1/2 in.	4 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	-	-
HFZ1206YW3S	1/2 in.	6 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT		-
HFZ1208YW3S	1/2 in.	8 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	-	-
HFZ1202YW4S	1/2 in.	2 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	-	-
HFZ1204YW4S	1/2 in.	4 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	-	-
HFZ1206YW4S	1/2 in.	6 ft.	1/2 in. MNPT Swivel x 1/2 in. MNPT	-	-



# **Polyurethane Recoil Hose**

The Flexzilla® revolution continues with the Flexzilla polyurethane recoil air hose. Flexzilla recoil air hose exhibits extreme, allweather flexibility and outperforms nylon hose. Plus, with the field repairable fittings, damaged hose can be repaired quickly, using tools commonly available on the jobsite.

### **FEATURES:**


- Extreme all-weather flexibility (-40° to 165°F)
- Polyurethane outperforms nylon:
- More flexible
- Will not become brittle over time
- Better recoil memory
   Working pressure at 70°F: 120 psi
   1/4 in. MNPT reusable ends
- Safety factor: 3:1
- Tool end: 16 in. tail with swivel fitting
- Compressor end: 8 in. tail with rigid fitting
- Pre-applied thread sealer

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
LP1410AFZ	1/4 in.	10 ft.	1/4 in. MNPT	•
LP1415AFZ	1/4 in.	15 ft.	1/4 in. MNPT	•
LP1420AFZ	1/4 in.	20 ft.	1/4 in. MNPT	•
LP1425AFZ	1/4 in.	25 ft.	1/4 in. MNPT	•



# **Hose Crimper**

	Hose Crimper	
Part No.	Die Bore Sizes	Retail Packaging
A5	5/8 in. 37/64 in. (For 3/8 in. Flexzilla Air Hose) 17/32 in. 7/16 in. (For 1/4 in. Flexzilla Air Hose) 11/16 in. (For 1/2 in. Flexzilla Air Hose)	-

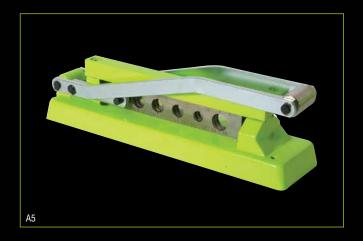



### Flexzilla® Pro Air Hose



Flexzilla® Pro Air Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application. The field repair and custom length hose process takes

# 





**CUT** – Measure and cut desired length of hose at 90° angle.



INSTALL – Slide spiral fitting and nut onto hose.Push hose onto fitting until hose reaches threads.



**TIGHTEN** – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.

# FIELD REPAIRABLE



**CUT** – Cut damaged portion of hose at 90° angle. Slide fitting nuts onto hose.



**INSTALL** – Slide hose onto fitting until hose reaches threads.



**TIGHTEN** – Tighten fitting nuts until snug.




# **Custom Hose Centers**








The Flexzilla® Pro Custom Hose Centers allow you to provide your customers with custom length hose assemblies. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site.

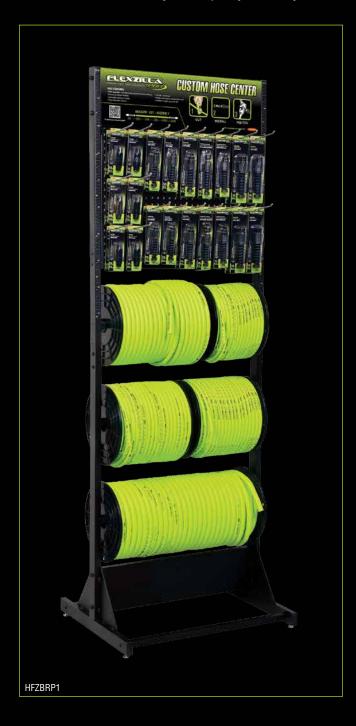

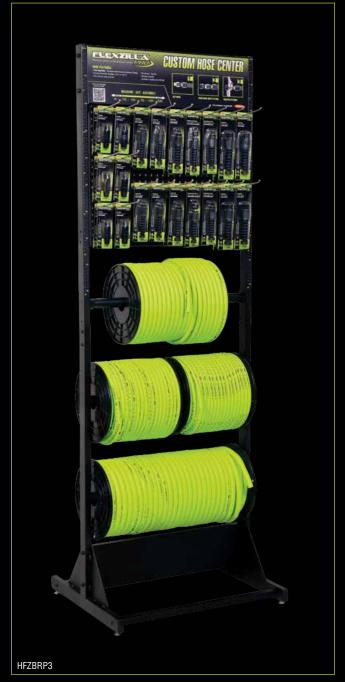



# **Custom Hose Centers (continued)**







	HFZBRP1 - Flexzilla® Pro Custom Hose Center	
Part No.	Description	Rack Quantity
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool	1 ea.
HFZ14250YW	Flexzilla® Pro Air Hose, 1/4 in. x 250 ft. Spool	2 ea.
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool	2 ea.
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool	1 ea.
RP900250	Flexzilla® Pro Air Hose Reusable Fitting, 1/4 in.	10 ea.
RP900250BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 1/4 in.	10 ea.
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	10 ea.
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	10 ea.
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.
RP901250	Flexzilla® Pro Air Hose Reusable Splicer, 1/4 in.	10 ea.
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	10 ea.
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.


RP900375
_


RP900375BS

CARRANT

HFZBRP3 - Flexzilla® Pro Custom Hose Center						
Part No.	Description	Rack Quantity				
HFZ12250YW	Flexzilla® Pro Air Hose, 1/2 in. x 250 ft. Spool	1 ea.				
HFZ38250YW	Flexzilla® Pro Air Hose, 3/8 in. x 250 ft. Spool	4 ea.				
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool	2 ea.				
RP900375	Flexzilla® Pro Air Hose Reusable Fitting, 3/8 in.	20 ea.				
RP900375BS	Flexzilla® Pro Air Hose Reusable Fitting with Ball Swivel, 3/8 in.	20 ea.				
RP900500	Flexzilla® Pro Air Hose Reusable Fitting, 1/2 in.	10 ea.				
RP900500S	Flexzilla® Pro Air Hose Reusable Fitting with Swivel, 1/2 in.	10 ea.				
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	10 ea.				
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	10 ea.				
RP901375	Flexzilla® Pro Air Hose Reusable Splicer, 3/8 in.	20 ea.				
RP901500	Flexzilla® Pro Air Hose Reusable Splicer, 1/2 in.	10 ea.				
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.				
	Parts also sald congrately in standard pack quantities					


Parts also sold seperately in standard pack quantities











HFZ38250YW



# **Reusable Fittings and Splicers – Air and Water Hose**







Flexzilla® Pro Reusable Fittings and Splicers allow you to quickly repair Flexzilla hose on the jobsite, or create a custom length hose in just three easy steps.

### **Splicers Include:**

 Reusable MNPT anodized aircraft aluminum fitting for Flexzilla and Flexzilla Pro Air Hose



Part No.	Description	Application	Fitting	Barb Size	Retail Packaging
RP900250	Reusable Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900250BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900250S	Reusable Swivel Fitting	Air	1/4 in. MNPT	1/4 in.	•
RP900375	Reusable Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900375BS	Reusable Ball Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900375S	Reusable Swivel Fitting	Air	1/4 in. MNPT	3/8 in.	•
RP900500	Reusable Fitting	Air	3/8 in. MNPT	1/2 in.	•
RP900500S	Reusable Ball Swivel Fitting	Air	3/8 in. MNPT	1/2 in.	•
RP901250	Hose Splicer	Air	-	1/4 in.	•
RP901375	Hose Splicer	Air		3/8 in.	•
RP901500	Hose Splicer	Air	-	1/2 in.	•
RP900625F	Reusable Fitting	Water	3/4 in. Female GHT	5/8 in.	•
RP900625M	Reusable Fitting	Water	3/4 in. Male GHT	5/8 in.	•

# **Bulk Air and Water Hose**








Flexzilla® Pro bulk hose spools allow you to create custom length hose.







Part No.	Application	Hose I.D.	Spool Length	Hose Fittings	Max. Working Pressure	Retail Packaging
HFZ14250YW	Air	1/4 in.	250 ft.	Sold separately	300 psi	-
HFZ38250YW	Air	3/8 in.	250 ft.	Sold separately	300 psi	
HFZ12250YW	Air	1/2 in.	250 ft.	Sold separately	300 psi	
HFZW58250YW	Water	5/8 in.	250 ft.	Sold separately	150 psi	-



### **Air Hose Assemblies**





Flexzilla® Pro Field Repairable Air Hose features extreme all-weather flexibility, rugged durability and won't kink under pressure. Its unique Flexible Hybrid Polymer material redefines flexibility. With reusable anodized aircraft aluminum fittings, the Flexzilla Pro Air Hose can be repaired on the jobsite in a few simple steps.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP1425YW2	1/4 in.	25 ft.	1/4 in. MNPT	•
HFZP1450YW2	1/4 in.	50 ft.	1/4 in. MNPT	•
HFZP14100YW2	1/4 in.	100 ft.	1/4 in. MNPT	•
HFZP3825YW2	3/8 in.	25 ft.	1/4 in. MNPT	•
HFZP3835YW2	3/8 in.	35 ft.	1/4 in. MNPT	•
HFZP3850YW2	3/8 in.	50 ft.	1/4 in. MNPT	•
HFZP38100YW2	3/8 in.	100 ft.	1/4 in. MNPT	•

### **FEATURES:**

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility, even in subzero temperatures (-40° to 140°F)
- Won't kink under pressure
- Lightweight and easy to handle
- Lays flat no memory
- Durable and abrasion-resistant outer cover
- Max. working pressure at 70°F: 300 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement to reduce wear and tear, prolonging the life of the hose





# Air Hose Kits - Include Hose, Coupler and Plug







This convenient hose kit features the revolutionary Flexzilla® Pro Flexible Hybrid Polymer air hose paired with a Red Industrial (Type D) ColorConnex® Coupler and Plug Set (one each). Combining Flexzilla's revolutionary design and the convenient color coding of ColorConnex, you get two great products in one. Plus, since the thread sealer is already installed on the coupler and plug, you're ready to go as soon as you reach the jobsite.

### **KIT INCLUDES:**

- Flexzilla Pro Air Hose
- ColorConnex Red Industrial (Type D) Coupler and Plug
- Pre-sealed Threads

Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP1425YW2-D	1/4 in.	25 ft.	1/4 in. MNPT	•
HFZP1450YW2-D	1/4 in.	50 ft.	1/4 in. MNPT	•
HFZP14100YW2-D	1/4 in.	100 ft.	1/4 in. MNPT	•
HFZP3825YW2-D	3/8 in.	25 ft.	1/4 in. MNPT	•
HFZP3850YW2-D	3/8 in.	50 ft.	1/4 in. MNPT	•
HFZP38100YW2-D	3/8 in.	100 ft.	1/4 in. MNPT	•

FEATURING:	Use color to:	
GolorGonnex <sup>®</sup> type d / Industrial	<ul><li>Match coupler &amp; plug types</li><li>Dedicate hose applications</li></ul>	



# **Custom Length Whip Hose with High Flow Ball Swivel**










Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZP3806YW2B	3/8 in.	6 ft.	1/4 in. MNPT High Flow Ball Swivel and Reusable Fitting (RP900375)	•

### WHY USE A WHIP HOSE?

- Increased longevity of the main hose
- Reduces user fatigue by eliminating weight of coupler/plug
- Increases mobility in tight spaces
- Improves air tool ergonomics



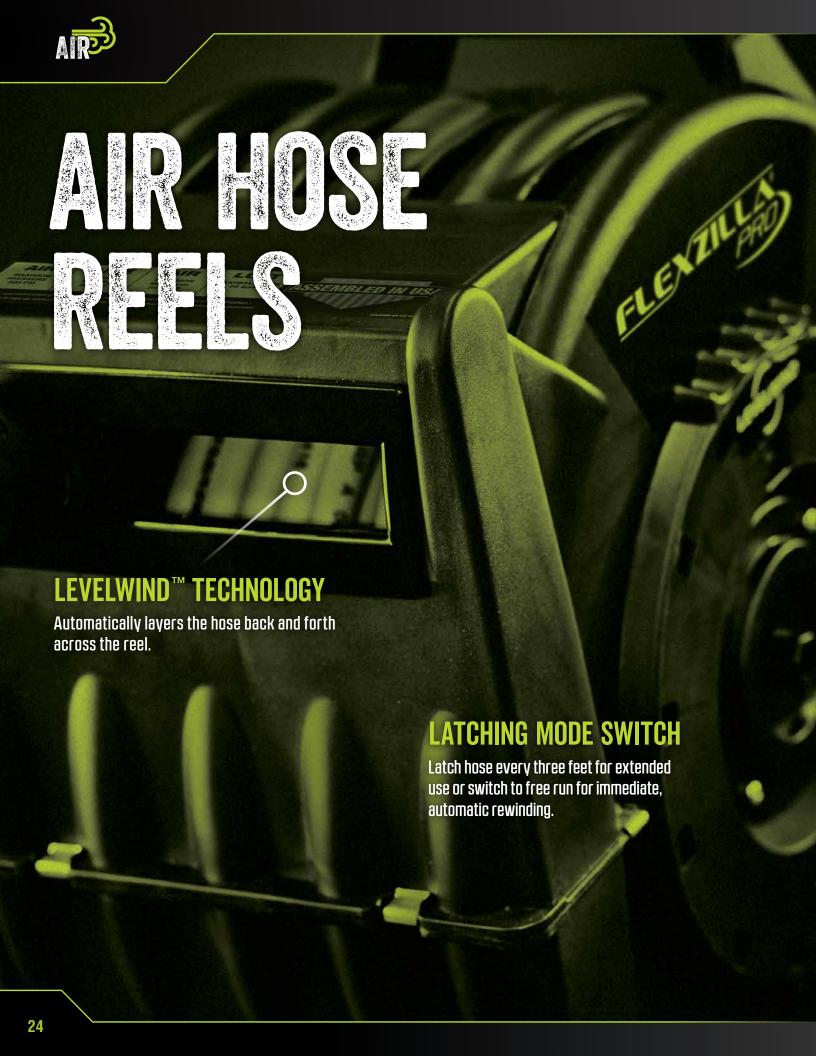



# **Retractable Air Hose Reels with Levelwind™ Technology**



Featuring Levelwind™ – Flexzilla's unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easily...every time – and includes Flexzilla® air hose and lead-in hose.





### **FEATURES:**

- Latching Mode Switch Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- Seven Position Locking Bracket These reels can swivel freely on a mounting bracket up to 135° or can be locked into place using the locking brace.
   Up to seven different locking angles can be utilized (L8300-W)
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Extra Large Swivel A 3/4 in. swivel reduces flow restrictions and allows for maximum flow
- Freestanding Base Portable Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on the ground
- Built-In Handle For carrying ease
- Durable Construction Made from durable UV stabilized polypropylene
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8305FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 1/4 in. MNPT	3/4 in. – 11½ Male GHT	1/4 in. MNPT	25 lbs.	•	•
L8306FZ	3/8 in.	75 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 1/4 in. MNPT	3/4 in. – 11½ Male GHT	1/4 in. MNPT	30 lbs.	•	•
L8335FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	3/4 in. Female GHT x 3/8 in. MNPT	3/4 in. – 11½ Male GHT	3/8 in. MNPT	29 lbs.	•	•

# **Mounting Brackets**

### **L8300-B FEATURES:**

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- · Mounting options: high wall or bench

### **L8300-W FEATURES:**

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- · Mounting options: wall or overhead ceiling






# Retractable Air Hose Reel



The Flexzilla® Pro Retractable Air Hose Reel comes pre-loaded with 50 feet of 3/8 in. Made in USA Flexzilla Air Hose. The reel features a self-leveling system which layers the hose evenly when rewinding. The auto retract/latch hose mechanism automatically locks the hose in place in 17 in. intervals. The swivel mounting bracket allows the reel to pivot in the direction of your work. The impact resistant reel housing protects and stores the air hose when not in use. This retractable reel is ideal for commercial and industrial use.

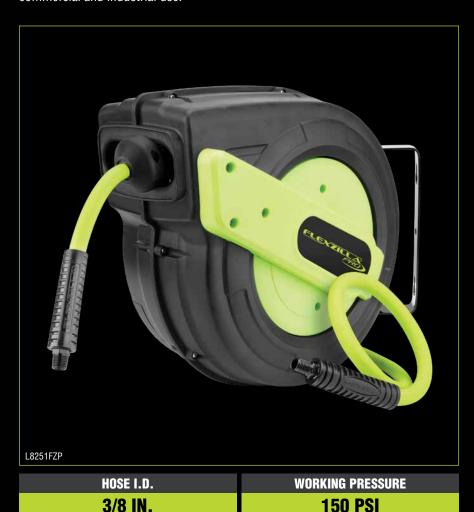

#### FEATURES:

- Self-leveling System Winds the hose evenly
- Auto Retract/Latch Hose Mechanism -Reel automatically locks hose in place at 17 in. intervals
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Swivel Mounting Bracket Pivots in the direction of your work, reel can be mounted to wall or ceiling
- Impact Resistant Housing
- Lead-in Hose Included 5 ft. x 1/4 in. MNPT



# Retractable Air Hose Reel

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Hose Outlet	Weight	Retail Packaging
L8251FZP	3/8 in.	50 ft.	150 psi	-40° to 140°	-40° to 140°	1/4 in. MNPT	16 lbs.	•



## **Retractable Air Hose Reels**



These economical, retractable air hose reels are ideal for the home shop.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	150 PSI



HOSE I.D.	WORKING PRESSURE
3/8 IN.	150 PSI

### **L8232FZ FEATURES:**

- Automatic Leveling System Layers the hose evenly when rewinding
- Multipoint Latch Mechanism Reel will automatically lock hose in place at any length wherever you stop
- Impact Resistant Housing
- Speed Control Device Provides consistent and safe speed when retracting the hose
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Swivel Mounting Bracket Pivots in the direction of your work, reel can be mounted to wall or ceiling
- Lead-in Hose Included 3 ft. x 1/4 in. MNPT

### **L8250FZ FEATURES:**

- Auto Retract/Latch Hose Mechanism Simplifies every job by keeping excess hose out of the work space
- Positive Latching Mechanism Locks hose automatically in 18 in. intervals
- **Durable Construction** Made from durable UV stabilized polypropylene
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Swivel Mounting Bracket Pivots in the direction of your work, reel can be mounted to wall or ceiling
- Lead-in Hose Included 3 ft. x 1/4 in. MNPT

### **Retractable Air Hose Reels**

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Hose Outlet	Weight	Retail Packaging
L8232FZ	3/8 in.	30 ft.	150 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	13 lbs.	•
L8250FZ	3/8 in.	50 ft.	150 psi	-40° to 140°	1/4 in. MNPT	1/4 in. MNPT	17 lbs.	•



# **Retractable Air Hose Reels – Single Axle Arm Support**



These retractable, open face hose reels are ideal for indoor shop, mobile and industrial applications.



#### FEATURES:

- Multi-Position Guide Arm Allows mounting on wall, tank or overhead
- Durable Heavy-Duty Steel Construction -Provides strength and stability to the reel and bracket
- Corrosion-Resistant Powder Coating -Provides extra measure of protection against the elements
- Four-Way Direction Rollers Allow the hose to be easily pulled from the reel
- Self-Locking Fasteners Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage
- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Metal Latching Pawl Makes an audible clicking sound allowing the latching zone to be locked quickly and easily
- Fully-Enclosed Spring Motor Packed with grease for extended life
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### Retractable Air Hose Reels - Single Axle Arm Support

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8603FZ	3/8 in.	25 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. FNPT	1/4 in. MNPT	25 lbs.		
L8611FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 1/4 in. MNPT	3/8 in. FNPT Swivel	1/4 in. MNPT*	40 lbs.	•	-
*1/4 in. MNPT x 3/8 in. bushing included										



# Retractable Air Hose Reels - Dual Axle Arm Support





Featuring dual axle arm support, these retractable open face hose reels can withstand constant vibration making them ideal for mobile installations.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

### **FEATURES:**

- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Durable Heavy-Duty Steel Construction Provides strength and stability to the reel
- Corrosion-Resistant Powder Coating Provides extra measure of protection against the elements
- Four-Way Direction Rollers Allow the hose to be easily pulled from the reel
- Self-Locking Fasteners Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage

- Multi-Position Guide Arm Allows mounting on wall, truck, tank or overhead
- Galvanized Dual Support Arms and Bases Resist rust and correcion
- Dual Axle Arm Support Can withstand the constant vibration of mobile installations
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### Retractable Air Hose Reels – Dual Axle Arm Support

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8711FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 1/4 in. MNPT	3/8 in. MNPT Swivel	3/8 in. MNPT	39 lbs.	-	•
L8741FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT x 3/8 in. MNPT Swivel	3/8 in. MNPT	3/8 in. MNPT	44 lbs.	_	•



# Retractable Air Hose Reels - Single Arm, Open Face





Built with quality and durability in mind, these reels incorporate heavy gauge steel and corrosion-resistant components to withstand the harsh conditions in the workplace.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



HOSE I.D.	WORKING PRESSURE
1/2 IN.	300 PSI

### **FEATURES:**

- Multi-Position Release Ratchet Allows appropriate amount of hose to be extended for each jobsite
- Durable Heavy-Duty Steel Construction Provides strength and stability to the reel
- Corrosion-Resistant Powder Coating Provides extra measure of protection against the elements
- Self-Locking Fasteners Stay tight even in mobile installations
- Narrow Size Ideal for easy placement and storage
- Multi-Position Guide Arm Allows mounting on wall, tank, overhead, bench, or vehicle
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### Retractable Air Hose Reels - Single Arm, Open Face


Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8011FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	3/8 in. MNPT Swivel x 3/8 in. MNPT	3/8 in. MNPT Swivel	3/8 in. MNPT	32 lbs.		
L8041FZ	1/2 in.	50 ft.	300 psi	-40° to 140°	1/2 in. MNPT Swivel x 1/2 in. MNPT	1/2 in. MNPT Swivel	1/2 in. MNPT	33 lbs.	-	•



# **Manual Air Hose Reels**



These manual open face hose reels are ideal for indoor shop, mobile and industrial applications.

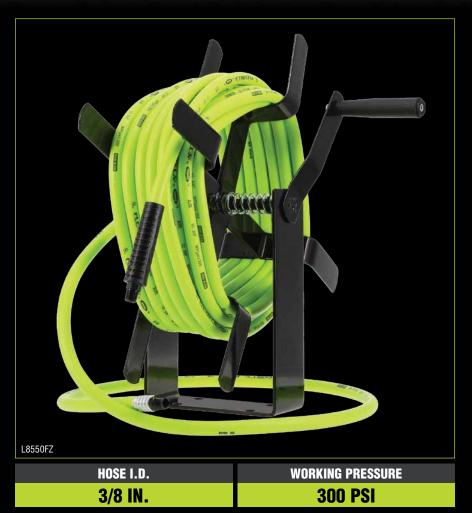

### **FEATURES:**

- Swivel Handle Pivots in hand for winding ease
- Mounting Bracket Mount reel to wall, workbench or vehicle
- Swivel Heavy-duty 1/4 in. brass
  Baked Enamel Finish Provides a smooth and durable finish
- Bend Restrictor Prolongs the life of the
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### **Manual Air Hose Reels**


Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8550FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	15 lbs.	-	•
L8560FZ	3/8 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	22 lbs.	-	•



# **Manual Air Hose Reels - Fixed, Heavy Duty**



These manual heavy-duty drum reels are compact and ideal for indoor shop and industrial applications.

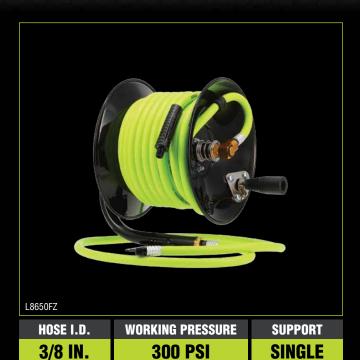



HOSE I.D.	WORKING PRESSURE	SUPPORT
3/8 IN.	300 PSI	DUAL

### FEATURES:

- Heavy-Duty Drum Heavy-duty steel reinforced drum.
- Powder Coat Finish Provides a smooth and durable finish
- Inlet Swivel Heavy-duty 1/4 in. brass
- Tapered Side Walls Store more hose in less space
- Swivel Handle Pivots in hand for winding ease
- Mounting Bracket Mount reel to wall, workbench, or vehicle
- Bend Restrictor Prolongs the life of the air hose

- Dual Support Provides extra stability for the big jobs (L8652FZ only)
- Spring Tension Brake Keeps hose from unwinding unintentionally (L8652FZ only)
- Brake Keeps hose from unwinding unintentionally (L8650FZ only)
   Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### Manual Air Hose Reels – Fixed, Heavy Duty

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8650FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	16 lbs.		•
L8652FZ	3/8 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	30 lbs.	•	•



## **Manual Air Hose Reels - Portable**



Designed for portability, these reels are useful just about anywhere on the jobsite. Use an air manifold with the supply hose to service multiple air tools (air manifold is sold separately). The hose layering guide spools hose back onto the reel eliminating tangles; cleanup is faster and easier.



HOSE I.D.	WORKING PRESSURE
3/8 IN.	300 PSI



1/4 IN.	300 PSI
HOSE I.D.	WORKING PRESSURE

### **FEATURES:**

- Hose Layering Guide Manually operated guide smoothly winds hose without tangles
- **Spring Tension Brake** Keeps hose from unwinding unintentionally
- Carrying Handle For complete portability
- Support Legs Attach support legs for placing reel on ground.

  Predrilled holes can be used for staking reel to the ground
- Mounting Bracket Reel can be mounted on truck, wall or bench
- Swivel Handle Swivels in hand for winding ease. Folds in for transporting
- Hose Material Flexible Hybrid Polymer
- Lead-in Hose Included 5 ft.



### **Manual Air Hose Reels – Portable**

Part No.	Hose I.D.	Hose Length	Working Pressure @ 70°F	Temperature Range (F°)	Lead-in Hose Connection	Reel Inlet	Hose Outlet	Weight	Retail Packaging	Assembled in USA
L8651FZ	3/8 in.	50 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	•	•
L8654FZ	1/4 in.	100 ft.	300 psi	-40° to 140°	1/4 in. MNPT x 1/4 in. MNPT	1/4 in. MNPT	1/4 in. MNPT	21 lbs.	-	•



# **Lead-In Hoses**



Flexzilla hose reels come equipped with a lead-in hose as standard equipment. Details regarding the lead-in hose that comes with each reel model are listed below. If for some reason you need to replace your lead-in hose, please refer to the part number that corresponds to your model of reel.





Part No.	Lead-in Hose For Part Nos.	Hose I.D.	Hose Length	Fittings	Hose Material	Working Pressure @ 70°F	Temperature Range (F°)	Retail Packaging	Made in USA	Assembled in USA
L8011FZLI	L8011FZ	3/8 in.	5 ft.	3/8 in. MNPT Swivel x 3/8 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°			
L8250FZLI	L8250FZ	3/8 in.	3 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	150 psi	-40° to 140°			•
L8251FZPLI	L8251FZP	3/8 in.	5 ft.	1/4 in. MNPT	Flexible Hybrid Polymer	150 psi	-40° to 140°	-	-	•
L8305FZLI	L8305FZ L8306FZ	3/8 in.	5 ft.	3/4 in. Female GHT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	-	-
L8335FZLI	L8335FZ	1/2 in.	5 ft.	3/4 in. Female GHT x 3/8 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	-	-
L8611FZLI	L8611FZ L8711FZ	3/8 in.	5 ft.	3/8 in. MNPT Swivel x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	•	-
L8651FZLI	L8550FZ L8560FZ L8603FZ L8650FZ L8651FZ L8652FZ	3/8 in.	5 ft.	1/4 in. MNPT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	•	1
L8654FZLI	L8654FZ	1/4 in.	5 ft.	1/4 in. MNPT x 1/4 in. MNPT	Flexible Hybrid Polymer	300 psi	-40° to 140°	-	-	•



# 360° ROTATION

Ball swivel rotates 360° at a 30° angle.

# **HIGH FLOW**

High flow couplers and plugs allow twice the amount of airflow to your tool.



# **High Flow Couplers and Plugs**






Flexzilla® Pro High Flow couplers and plugs allow Twice The Flow to your air tools compared to standard interchanges. Connect Flexzilla High Flow fittings from your tool all the way to the compressor. This ensures the best performance your air system can provide. For maximum efficiency, use Flexzilla Pro High Flow.



### **Don't Starve Your Air Tool!**

- Push-To-Connect System
- Maximum Torque
- Maximum RPM
- Ideal for spray guns and impact tools or any high output tool

# Flexzilla Pro High Flow Ball Swivel brings ergonomic ease to any tool attached to it. Save your wrist and improve your ability to get into hard-to-reach places.

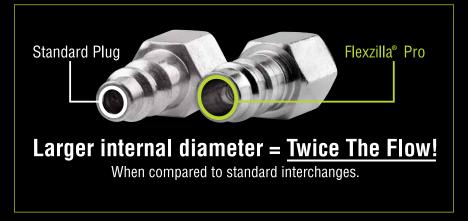

Ball swivel rotates 360° at a 30° angle.






# **High Flow Couplers and Plugs**






# **Couplers**







Гуре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
ers						
Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	•
Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	
Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	•
Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	
Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	•
Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Steel/Aluminum*	
Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	•
Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Steel/Aluminum*	-
	Z Z Z Z Z Z	Z High Flow	Z High Flow 1/4 in. FNPT Z High Flow 1/4 in. FNPT Z High Flow 1/4 in. FNPT Z High Flow 1/4 in. MNPT Z High Flow 3/8 in. FNPT Z High Flow 3/8 in. FNPT Z High Flow 3/8 in. MNPT Z High Flow 3/8 in. MNPT Z High Flow 3/8 in. MNPT	Ers  Z High Flow 1/4 in. FNPT 1/4 in.  Z High Flow 1/4 in. FNPT 1/4 in.  Z High Flow 1/4 in. MNPT 1/4 in.  Z High Flow 1/4 in. MNPT 1/4 in.  Z High Flow 3/8 in. FNPT 1/4 in.  Z High Flow 3/8 in. FNPT 1/4 in.  Z High Flow 3/8 in. MNPT 1/4 in.  Z High Flow 3/8 in. MNPT 1/4 in.  Z High Flow 3/8 in. MNPT 1/4 in.	Eers         Z       High Flow       1/4 in. FNPT       1/4 in.       300 psi         Z       High Flow       1/4 in. FNPT       1/4 in.       300 psi         Z       High Flow       1/4 in. MNPT       1/4 in.       300 psi         Z       High Flow       3/8 in. FNPT       1/4 in.       300 psi         Z       High Flow       3/8 in. FNPT       1/4 in.       300 psi         Z       High Flow       3/8 in. FNPT       1/4 in.       300 psi         Z       High Flow       3/8 in. MNPT       1/4 in.       300 psi	### High Flow 1/4 in. FNPT 1/4 in. 300 psi Steel/Aluminum*    High Flow 1/4 in. FNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 1/4 in. MNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 1/4 in. MNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 3/8 in. FNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 3/8 in. FNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 3/8 in. MNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 3/8 in. MNPT 1/4 in. 300 psi Steel/Aluminum*   High Flow 3/8 in. MNPT 1/4 in. 300 psi Steel/Aluminum*

"Nickei Plated Steel with Anodized Aluminum Sleeve


-X = Product offered in bulk, individually bagged product

# **Plugs**











Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
High Flow Plugs							
A53430FZ-X	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	_
A53440FZ-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	
A53630FZ-X	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	
A53640FZ-X	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	
A53440FZBS	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•
A53440FZBS-X	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	
High Flow Plugs	– 2-Pc.						
A53430FZ-2PK	Z	High Flow	1/4 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	•
A53440FZ-2PK	Z	High Flow	1/4 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•
A53630FZ-2PK	Z	High Flow	3/8 in. FNPT	1/4 in.	300 psi	Nickel Plated Steel	•
A53640FZ-2PK	Z	High Flow	3/8 in. MNPT	1/4 in.	300 psi	Nickel Plated Steel	•
		-X = Produc	ct offered in bulk,	individuall	v bagged pro	oduct	



# **High Flow Coupler and Plug Kits**

















Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Contents	Retail Packaging
3-Pc. Coupler and F	Plug Kit							
A53452FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) FNPT Plug and (1) MNPT Plug	•
7-Pc. Coupler and F	Plug Kits	3						
A53457FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	•
A53657FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug	•
14-Pc. Coupler and	Plug Ki	t						
A53458FZ	Z	High Flow	1/4 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(2) FNPT Coupler, (2) MNPT Coupler, (4) FNPT Plug and (6) MNPT Plug	•
3-Way Manifold								
A86666FZ	Z	High Flow	3/8 in. NPT	1/4 in.	300 psi	Steel/Aluminum*	(1) 3-Way Flat Hex Manifold, (3) A53626FZ and (1) A53640FZ	•
			,	Nickel Plated	Steel with Anodize	ed Aluminum Sleeve		




# **Heavy Duty Safety Couplers and Plugs**



Flexzilla® Pro Heavy Duty Safety Couplers and Plugs feature ZVR™ Technology, Zero Valve Restriction provides maximum CFM possible. Paired with quick, safe and easy connections, Flexzilla Pro HD Couplers and Plugs are the best choice for maximum performance from your air tools.



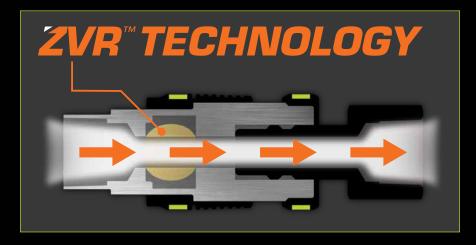

### **FEATURES:**

- ZVR™ Technology Zero Valve Restriction provides absolute throughput and feeds your tool the maximum CFM possible
- Safety Coupler Connect and disconnect under zero pressure
- Non-marring



### **QUICK, SAFE & EASY CONNECTIONS**

**ENGAGE AT ZERO PRESSURE** 

**DISENGAGE AT ZERO PRESSURE** 



Push-to-connect under zero pressure



Push sleeve up to open valve and engage air flow



Pull sleeve down to shut off air flow and pull top collar down to disengage plug under zero pressure



# **Heavy Duty Safety Couplers and Plugs**

PRO

# **Couplers**


Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
Heavy Duty Sa	afety Cou	ıplers					
A55618FZ	Н	Industrial	3/8 in. FNPT	1/2 in.	175 psi	Multiple*	•
A55628FZ	Н	Industrial	3/8 in. MNPT	1/2 in.	175 psi	Multiple*	•
A55818FZ	Н	Industrial	1/2 in. FNPT	1/2 in.	175 psi	Multiple*	•
A55828FZ	Н	Industrial	1/2 in. MNPT	1/2 in.	175 psi	Multiple*	•
			*Nickel Plate	d Steel and ABS	S		





# **Plugs**

Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Retail Packaging
Heavy Duty Sa	afety Plu	gs					
A55630FZ	Н	Industrial	3/8 in. FNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55640FZ	Н	Industrial	3/8 in. MNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55830FZ	Н	Industrial	1/2 in. FNPT	1/2 in.	232 psi	Nickel Plated Steel	•
A55840FZ	Н	Industrial	1/2 in. MNPT	1/2 in.	232 psi	Nickel Plated Steel	•





# **Heavy Duty Safety Coupler and Plug Kits**



Part No.	Туре	Interchange	Connection Size	Body Size	Max. Pressure	Material	Contents	Retail Packaging
5-Pc. Coupler a	and Plug	Kits						
A55656FZ	Н	Industrial	3/8 in. NPT	1/2 in.	175 psi	Multiple*	(1) FNPT Coupler, (1) MNPT Coupler, (1) FNPT Plug, and (2) MNPT Plugs	•
A55856FZ	Н	Industrial	1/2 in. NPT	1/2 in.	175 psi	Multiple*	(1) FNPT Coupler, (1) MNPT Coupler, (1) FNPT Plug, and (2) MNPT Plugs	•
				*Niz	rkal Plated Steel and	ADC		

\*Nickel Plated Steel and ABS







# **MODULAR ACCESSORIES SYSTEM**

Includes needle tips, chip guards, extensions and OSHA-compliant safety nozzles.



# **INCREASED AIR FLOW**

Variable flow trigger that can be tailored to a high power job or delicate precision work.

# THOUGHTFULLY DESIGNED

Ergonomic handle and rubberized grip.



# **Modular Blow Guns**



Introducing Flexzilla™ Blow Guns and accessories. Flexzilla features an ergonomically superior gun body for maximum comfort and control which reduces operator fatigue. A variable flow trigger regulates air volume precisely with maximum flow, equal to or greater than the competition. The exclusive modular accessories system allows the Flexzilla blow guns to be customized for extension length and tips needed for any job. Flexzilla safety nozzles and bendable extension are labeled to meet or exceed OSHA standards.

### **BLOW GUN FEATURES:**

- Variable flow trigger regulates air volume precisely with maximum flow, equal to or greater than the competition (X3™ Blow Guns only)
- Brass valve seat and trigger pin

   for better sealing and durability
   (X1™ Blow Guns only)
- Ergonomic handle for comfort and easy handling
- Storage hook for easy storage
- 1/4 in. NPT inlet





Part No.	Description	CFM	dBA	Variable Flow Trigger	Meets OSHA Number	Line psi	Retail Packaging
AG1102FZ	Flexzilla™ X3™ Blow Gun with Quiet-Flo Safety Nozzle	36	87	•	1910.95 (a), 1910.242 (b)	100	•
AG1202FZ	Flexzilla™ X3™ Blow Gun with Xtreme-Flo Safety Nozzle	50	99	•	1910.242 (b)	100	•
AG1402FZ	Flexzilla™ X1™ Blow Gun with Quiet-Flo Safety Nozzle	36	87		1910.95 (a), 1910.242 (b)	100	•
AG1502FZ	Flexzilla™ X1™ Blow Gun with Xtreme-Flo Safety Nozzle	43	99	-	1910.242 (b)	100	•

# **Modular Blow Gun Kits**

### Flexzilla™ X3™ 6-Pc. Blow Gun Kit

### **AG1200FZKIT INCLUDES:**

- a Flexzilla X3 Blow Gun with Variable Flow Trigger
- b − 6 in. Extension
- c Chip Guard
- d Tri-Thrust Safety Nozzle
- e Xtreme-Flo Safety Nozzle
- f Quiet-Flo Safety Nozzle

### Flexzilla™ X1™ 10-Pc. Blow Gun Kit

### **AG1500FZKIT INCLUDES:**

- a Flexzilla X1 Blow Gun
- b 6 in. Extensions (x2)
- c Needle Tips (1 in., 2 in. & 3 in.)
- d Xtreme-Flo Safety Nozzle
- e Quiet-Flo Safety Nozzle
- f Rubber Tip
- g Tip Adapter

Part No.	Retail Packaging
AG1200FZKIT	•
AG1500FZKIT	•








# **Modular Blow Guns Accessories System**

The exclusive modular accessories system (sold separately) allows the Flexzilla™ blow guns to be customized for extension length and tips needed for any job. Flexzilla safety nozzles and bendable extension are labeled to meet or exceed OSHA standards. Extensions can be combined up to 6 feet.



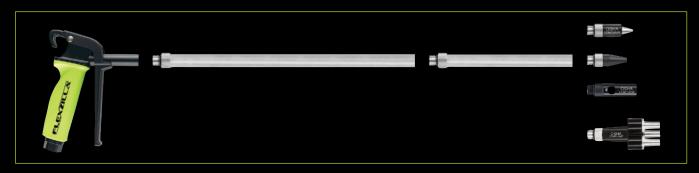


















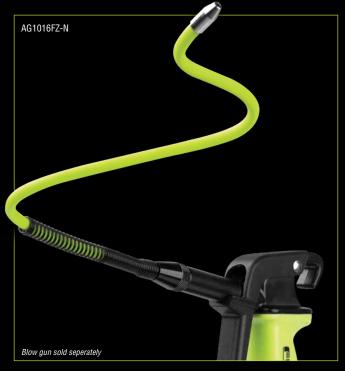

Part No.	Description	Retail Packaging
AG934FZ	Flexzilla™ Rubber Tip	•
AG1090FZ	Flexzilla™ Xtreme-Flo Safety Nozzle	•
AG1091FZ	Flexzilla™ Quiet-Flo Safety Nozzle	•
AG1093FZ	Flexzilla™ Tri-Thrust Safety Nozzle	•
AG1099FZ	Flexzilla™ 5-Pc. Tip Adapter Kit	•
AG1092FZ	Flexzilla™ Chip Guard	•
AG1006FZ	Flexzilla™ 6 in. Extension	•
AG1012FZ	Flexzilla™ 12 in. Extension	•
AG1016FZ-N	Flexzilla™ 16 in. Bendable Extension	•



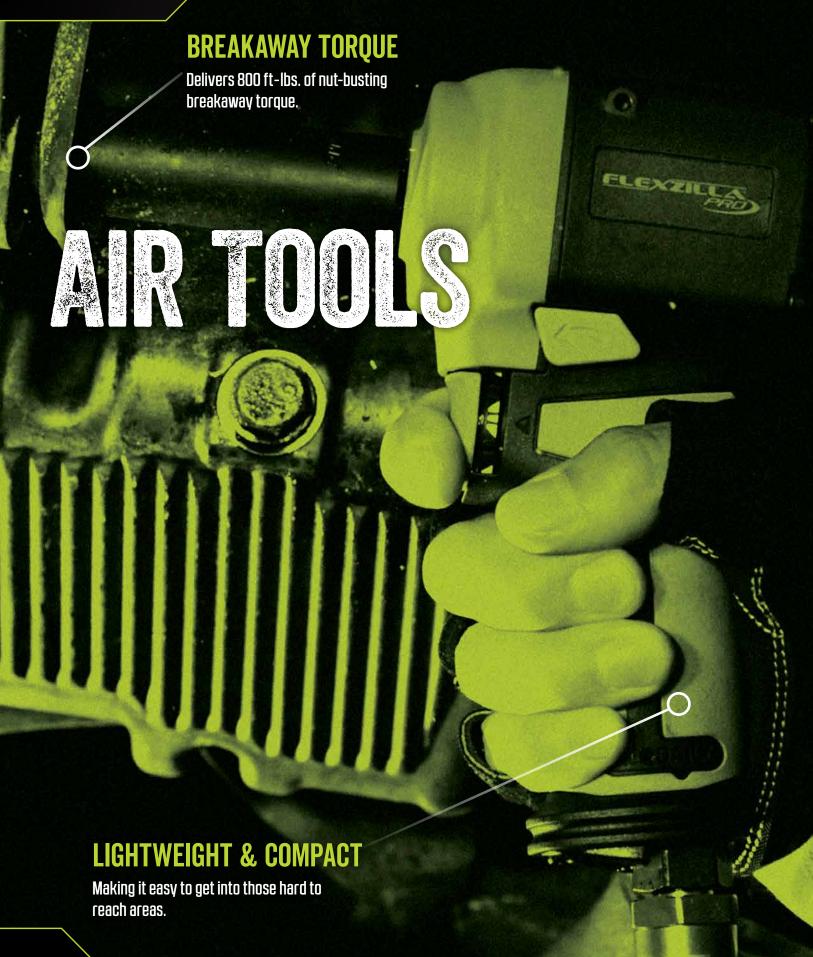



# **Mini Impact Wrench**





Proving once again you don't have to be big to be powerful. Flexzilla® Pro Air Tools pack high RPM and maximum torque into the lightest, most compact air tools on the market. The mini impact wrench has 800 ft-lbs. of nut-busting breakaway torque and an extremely lightweight design.


### Flexzilla Pro Mini Impact Wrench (AT1475FZ)

### **FEATURES:**

- 800 ft-lbs. of nut-busting breakaway torque
   Compact design Ideal for tight spaces, 4.4 in.
   Torque selector Maximum torque, 550 ft-lbs.
   Extremely lightweight Composite design, 2.5 lbs.
   Patented Forward/Reverse toggle switch
- Handle exhaust Directs air away from user
- 1/4 in. NPT air inlet with built-in swivel
- Ergonomic grip
- High speed, 9500 RPM
  Air Consumption: 4.8 CFM
- Drive: 1/2 in.

### **INCLUDES:**

- Flexzilla Pro Mini Impact Wrench
- Flexzilla Pro High Flow 1/4 in. MNPT Ball Swivel Plug



Part No.	Retail Packaging
AT1475FZ	•



TORQUE	DRIVE
800 FT-LBS.	1/2 IN.
HIGH SPEED	AIR CONSUMPTION
9500 RPM	4.8 CFM





Inflate and check tire pressure simultaneously at a safe distance.



# **Tire Inflators**



Tire inflators deliver accurate pressure to car, truck, bike, and off-road tires.



### **AL2000FZ FEATURES:**

- Range: 20 to 170 psi
- Straight-on chuck with 12 in. air hose
- Heavy-duty gauge
- Indicator bar is calibrated in 2 psi increments from 20 to 100 ps



### **AL2025FZ-1 FEATURES:**

- Range: 10 to 170 psi
- Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 ft. air hose extension



### **AL2025FZ-2 FEATURES:**

- Range: 10 to 170 psi
- · Quick-connect coupler and plug
- Trigger actuated deflate function
- Straight lock-on connector
- Dial gauge with protective rubber guard
- Includes: 3 and 15 ft. air hose extension
- OSHA Compliant 15 ft. hose only

Retail Packaging

Part No.	Туре	Hose I.D.	Hose Length	Inlet	Body Material	Retail Packaging
AL2000FZ	Tire Inflator	1/4 in.	1 ft.	1/4 in. FNPT	Die-cast Zinc	•
AL2025FZ-1	Inflator	1/4 in.	3 ft.	1/4 in. FNPT	Nylon/Brass	•
AL2025FZ-2	Inflator Kit	1/4 in.	3 ft. & 15 ft.	1/4 in. FNPT	Nylon/Brass	•
HGH2-FZ	Truck Tire Inflator Kit	3/8 in.	50 ft.	1/4 in. MNPT	_	•

# **Truck Tire Inflator Kit**



The Flexzilla® truck tire inflator kit uses a truck's on-board air supply to inflate tires in remote situations.

### **HGH2-FZ INCLUDES:**

- 3/8 in. x 50 ft. air hose
- Glad-hand attachment
- 30° Dual air chuck





# **EXCLUSIVE SWIVELGRIP®**

SwivelGrip® allows the hose and grip to rotate independently, releasing coils naturally, easily and effortlessly. The large, comfortable gripping surface on both ends of the hose lets you use the power of your entire hand to make tight connections easy. (SwivelGrip® Patent Pending)

# **EXTREME ALL-WEATHER FLEXIBILITY**

Lightweight and easy to handle, Flexzilla® hoses lay flat and have no memory, even in extreme weather conditions.

5/8"

150 Garden

PSI

# FLEXIBLE HYBRID POLYMER Flexzilla hoses have a durable

abrasion-resistant outer cover.



# **SwivelGrip® Garden and Lead-in Hose Assemblies**





Premium Flexzilla® SwivelGrip® Garden Hose makes it easier to work around your home and lawn. SwivelGrip action eliminates twists that occur when uncoiling a hose. Conventional garden hose can trap coils that tighten into kinks as you move across the yard. SwivelGrip allows the hose and grip to rotate independently, releasing coils naturally, easily and effortlessly. The large, comfortable gripping surface on both ends of the hose lets you use the power of your entire hand to make tight connections easy. Flexzilla SwivelGrip Garden Hoses are engineered with a lightweight Flexible Hybrid Polymer which lays flat, eliminates kinking under pressure and is drinking water safe..



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZG503YWS	5/8 in.	3 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG505YWS	5/8 in.	5 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG510YWS	5/8 in.	10 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG510YWS-6X	5/8 in.	10 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG525YWS	5/8 in.	25 ft.	3/4 in 11¹/₂ GHT	•
HFZG550YWS	5/8 in.	50 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG550YWS-30X	5/8 in.	50 ft.	3/4 in 11¹/₂ GHT	•
HFZG550YWS-40X	5/8 in.	50 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG575YWS	5/8 in.	75 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG5100YWS	5/8 in.	100 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•

Part nos. with a -30X or -40X suffix include 30 or 40 hose assemblies respectively on a quarter pallet display

Part no. with a -6X suffix includes 6 hose assemblies in a retail merchandiser display



- Male and female SwivelGrip® Connections
- Hose and grip rotate independently
- Makes connections and uncoiling easy
- Naturally releases coils
- Extreme all-weather flexibility
- · Durable outer cover resists abrasion, UV and mold
- Won't kink under pressure
- · Lightweight and easy to handle
- Lays flat no memory
- · Reinforced mid-layering provides extra strength
- · Anodized aircraft aluminum ends
- . Max. working pressure at 70°F: 150 psi
- Drinking water safe









# **Garden Hose Merchandiser and Pallets**







# **Colors<sup>™</sup> SwivelGrip<sup>®</sup> Garden Hose Assemblies**





From the makers of Flexzilla®, Colors™ Garden Hose makes it easier to work around your home and lawn. SwivelGrip action eliminates twists that occur when uncoiling a hose. Conventional garden hose can trap coils that tighten into kinks as you move across the yard. SwivelGrip allows the hose and grip to rotate independently, releasing coils naturally, easily and effortlessly. The large, comfortable gripping surface on both ends of the hose lets you use the power of your entire hand to make tight connections easy. Premium Colors™ Garden Hose features the same Flexible Hybrid Polymer material as our renowned ZillaGreen® hoses, but comes in earthy colors ideal for a variety of landscapes.





# COLORS HFZC550BRS



### **SWIVELGRIP® FEATURES:**

- Male and female SwivelGrip® Connections
- Hose and grip rotate independently
- Makes connections and uncoiling easy
- Naturally releases coils

Part No.	Color	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZC550BRS	Brown Mulch	5/8 in.	50 ft.	3/4 in 11¹/₂ GHT	•
HFZC550TCS	Red Clay	5/8 in.	50 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•





# **Garden and Lead-in Hose Assemblies**






Flexzilla® Garden Hose is engineered with a Flexible Hybrid Polymer that is both lightweight and durable. This premium hose redefines flexibility and is easy to maneuver around your yard. Flexzilla Garden Hose has zero memory which allows the hose to lay flat and ensures that sprinklers stay put without twisting. Its durable outer cover is abrasion-resistant, and the reinforced mid-layering provides extra strength. Plus, with our superior O-ring, you get a long-term, leak-free connection at the spigot. The Flexible Hybrid Polymer inner tube material is drinking water safe.



Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZG503YW	5/8 in.	3 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG505YW	5/8 in.	5 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG510YW	5/8 in.	10 ft.	3/4 in 11¹/₂ GHT	•
HFZG525YW	5/8 in.	25 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG550YW	5/8 in.	50 ft.	3/4 in 11¹/₂ GHT	•
HFZG550YW-48T	5/8 in.	50 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG575YW	5/8 in.	75 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG575YW-48T	5/8 in.	75 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG5100YW	5/8 in.	100 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG5100YW-36T	5/8 in.	100 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG650YW*	3/4 in.	50 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG675YW*	3/4 in.	75 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•
HFZG6100YW*	3/4 in.	100 ft.	3/4 in 11¹/₂ GHT	•



<sup>\*</sup>Not certified by IAPMO to be in compliance with NSF/ANSI 61: Drinking Water System Components











# **Garden Hose Kit with Quick Connect Attachments**



The Flexzilla® Garden Hose Kit with Quick Connect Attachments features Flexible Hybrid Polymer material with extreme all-weather flexibility that allows hose to lie flat and won't kink under pressure. It's lightweight and coils easily. The convenient Flexzilla Garden Hose Kit comes with hose, twist action nozzle, quick connect flow-stop coupler, spigot adapter, hose adapters and hose hanger to make gardening a snap.



# Part No. Hose I.D. Hose Length Fittings Retail Packaging

3/4 in. - 111/2 GHT

50 ft.

### **HOSE FEATURES:**

- Extreme all-weather flexibility
- Won't kink under pressure
- · Lightweight, coils easily
- Lays flat no memory
- · Durable outer cover resists abrasion, UV and mold
- Reinforced mid-layering provides extra strength
- · Quick connect couplers
- Max. working pressure at 70°F: 150 psi
- · Drinking water safe

### **SPRAY NOZZLE FEATURES:**

- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)

### **GARDEN HOSE KIT INCLUDES:**

- a Flexzilla Garden Hose with Quick Connect Couplers
- b Hose Hanger
- c Quick Connect Spray Nozzle
- d Quick Connect Spigot Adapter
- e (2) Quick Connect Attachment Adapters



# **3-Piece Nozzle Kit with Quick Connections**

### KIT INCLUDES:

HFZG12050QN

- Quick Connect Spray Nozzle
- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)

1/2 in.

- Flow-Stop Coupler Prevents user from being sprayed when connecting and disconnecting
- Quick Connect Attachment Adapter Easily connect to sprinkler or other attachments

Part No.	Retail Packaging
HFZGAK01	-
HFZGAK02	•







# **NEW** Quick Connect Garden Hose Fittings

Flexzilla™ Quick-Connect Garden Hose Fittings make connecting and disconnecting attachments fast and easy. Switch out nozzles and sprinklers in a snap by attaching an adapter to all of your favorite watering tools. Connect Flow-Stop Couplers for effortless connections to adapters and spigots. Plus, our Flow-Stop Couplers automatically stop water flow, preventing spray back when connecting and disconnecting the hose. Add convenient, water-tight connections from the spigot to sprayer with Flexzilla Quick-Connect Garden Hose Fittings.

### **COMMON FEATURES:**

- Flow-Stop Coupler prevents user from being sprayed when connecting and disconnecting
- Easily connect to standard garden hose threads (3/4 in. 11½ GHT)
- Compatible with Flexzilla® Quick-Connect Flow-Stop Couplers and Water Hose Adapters

HFZGAK11	

### **HFZGAK11 KIT INCLUDES:**

- (1) Quick-Connect Coupler, Male
- (1) Quick-Connect Water Hose Adapter, Female Plug



### **HFZGAK13 KIT INCLUDES:**

- (1) Quick-Connect Water Hose Adapter, Female Plug
- (4) Quick-Connect Water Hose Adapters, Male Plugs





### **HFZGAK12 KIT INCLUDES:**

- (1) Quick-Connect Flow-Stop Coupler, Female
- (2) Quick-Connect Water Hose Adapters, Male Plugs



### **HFZGAK14 KIT INCLUDES:**

- (1) Quick-Connect Flow-Stop Coupler, Female
- (1) Quick-Connect Coupler, Male
- (1) Quick-Connect Water Hose Adapter, Female Plug
- (2) Quick-Connect Water Hose Adapters, Male Plugs



# NEW

# **Marine Twin Outboard Flush Kit, 6-Piece**


Never leave your boat after turning on the water! This convenient and time saving Flexzilla® Marine Flush Kit allows you to flush twin outboard motors without the hassle of getting on and off the boat before turning on the water. The 6-piece kit features SwivelGrip® water hose engineered with flexible hybrid polymer material, a large grip, leak-free connections, dual on/off y-splitter, and quick-connect adapters. The automatic quick-connect flow-stop coupler prevents the user from being sprayed when connecting and disconnecting. Plus, the quick-connect nozzle allows you use the main hose to wash down your boat. The kit is lightweight, compact and easy to store on board any boat.

### FEATURES:

- SwivelGrip® Water Hose Ends make connections fast and easy. A large grip lets you use the power of your entire hand to make tight connection to your outboard motor easy
- Y-Splitter with Dual On/Off Valves The splitter allows you to feed water into twin outboard motors at the same time or it can be used to flush one motor at a time
- Quick-Connect Flow-Stop Coupler Turn on water at the spigot and connect flush kit to main hose. Coupler prevents user from being sprayed when connecting and disconnecting
- · Quick-Connect Adapters Make it easy to connect the flush kit
- Quick-Connect Nozzle The soft mist to jet spray pattern makes it easy to wash down the boat
- Convenient and Time Saving Kit No more hassle of getting on and off the boat before turning on the water
- · For use on board or while the boat is on the trailer


### KIT INCLUDES:

- (2) 3 ft. Flexzilla SwivelGrip Water Hoses
- (1) Dual On/Off Y-Splitter
- (1) Quick-Connect Flow-Stop Coupler Female
- (1) Quick-Connect Water Hose Plug Male
- (1) Quick-Connect Spray Nozzle

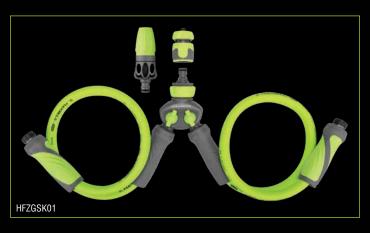

### **CONVENIENT AND TIME SAVING...**

### Never leave your boat after turning on the water!



QUICK-CONNECT COUPLER WITH AUTO FLOW-STOP



SWIVELGRIP® ENDS MAKE CONNECTIONS FAST AND EASY





# 2-Way Hose Splitter



The Flexzilla<sup>™</sup> 2-Way Hose Splitter eliminates the frustration of switching out hoses by creating two water sources from a single spigot.

- Twist action on/off valves Controls water flow for two hoses
- · Soft grip swivel nut for easy connections
- Spigot adapter: 1 in. to 3/4 in. GHT reducer bushing
- For outdoor and shop use: 40° to 120°F
- · Leak-free O-ring
- · Works with standard water hose or sprinklers

Part No.	Fitting Size	Retail Packaging
HFZGA60	1 in. or 3/4 in. GHT	•



# **Garden Hose Nozzles**

Flexzilla™ Garden Hose Nozzles are designed for a wide range of watering needs and are suitable for gardening, cleaning, washing your car, or showering dogs and pets. They are available in a variety of styles, are simple to operate and built to withstand of tough use.



### **NFZG51 FEATURES:**

- Thumb actuated pressure control adjusts from maximum spray to gentle flow
- Heavy duty and durable metal construction
- · Variable flow pattern Soft mist to jet spray
- Soft grip dial guard
- Comfortable non-slip rubber grip



### **NFZG52 FEATURES:**

- Thumb actuated pressure control adjusts from maximum spray to gentle flow
- Heavy duty and durable metal construction
- 7 adjustable spray patterns: jet, rinse, center, shower, cone, mist, flat
- Soft grip dial guard
- Comfortable non-slip rubber grip



### **NFZG61 FEATURES:**

NFZG61

**COMMON FEATURE:** 

to garden hoses

· Leak-free connections - O-ring seal

provides secure, watertight connections

- Thumb actuated design 3 position
- Heavy duty metal construction
- Adjustable spray patterns: shower, flat, jet
- Soft grip dial guard
- · Ergonomic soft grip handle



### **NFZG21 FEATURES:**

- Soft mist for flowers and plants
- Jet spray for long distances (up to 20 ft.)
- Soft grip outer housing
- Compact design



### **NFZG62 FEATURES:**

- · Variable flow pattern Soft mist to jet spray
- Heavy duty metal construction
- Soft grip outer housing

- · Compact design

Part No.	Description	Retail Packaging
NFZG21	Twist Action Garden Hose Nozzle - 4-Pattern	•
NFZG51	Heavy Duty Twist Action Adjustable Flow Garden Hose Nozzle	•
NFZG52	Heavy Duty 7-Pattern Adjustable Flow Garden Hose Nozzle	•
NFZG61	Heavy Duty Pistol Grip Garden Hose Nozzle	•
NFZG62	Heavy Duty Twist Action Garden Hose Nozzle	•
NFZG63	Twist Action Garden Hose Nozzle - 4-Pattern	•



### **NFZG63 FEATURES:**

- Adjustable spray patterns: shower, full, jet, cone
- · Soft grip dial guard





# **Garden Hose Nozzles (continued)**



### **NFZG64 FEATURES:**

- On/Off toggle switch with variable flow
- 6 adjustable spray patterns: mist, vertical, shower, cone, flat, jet
- · Durable outer housing
- Soft grip dial guard
- · Lightweight soft grip handle



### **NFZG67 FEATURES:**

- Heavy duty and durable metal construction
- 7 adjustable spray patterns: mist, vertical, shower, center, cone, flat, jet
- Flow control dial allows greater watering control
- On/off trigger with locking mechanism
- · Soft grip dial guard
- Twice rubberized grip for extra comfort



### **NFZG65 FEATURES:**

- Rotate nozzle to adjust water flow from a fine mist to a powerful jet stream
- Twist action knob that allows adjustable water flow
- On/off trigger with locking mechanism
- · Comfortable non-slip rubber grip
- Compact and lightweight design
- · Durable outer housing



### **NFZG66 FEATURES:**

- 7 adjustable spray patterns: mist, flat, cone, center, shower, jet, spout
- On/off trigger with locking mechanism
- · Comfortable non-slip rubber grip
- · Compact and lightweight design
- · Durable outer housing



### **NFZG68 FEATURES:**

- Adjustable pressure control adjusts from maximum spray to gentle flow
- · Heavy duty metal construction
- Rotate nozzle to adjust water flow from a fine mist to a powerful jet stream
- · Soft grip dial guard
- Ergonomic soft grip handle



### **NFZG69 FEATURES:**

- Adjustable pressure control adjusts from maximum spray to gentle flow
- Heavy duty metal construction
- 7 adjustable spray patterns: mist, vertical, shower, center, cone, flat, jet
- · Soft grip dial guard
- Ergonomic soft grip handle

Part No.	Description	Retail Packaging
NFZG64	Adjustable Garden Hose Nozzle - 6-Pattern	•
NFZG65	Metal Adjustable Pistol Grip Garden Hose Nozzle	•
NFZG66	Metal 7-Pattern Adjustable Pistol Grip Garden Hose Nozzle	•
NFZG67	Heavy Duty 7-Pattern Adjustable Pistol Grip Garden Hose Nozzle	•
NFZG68	Heavy Duty Adjustable Flow Pistol Grip Garden Hose Nozzle	•
NFZG69	Heavy Duty 7-Pattern Adjustable Flow Pistol Grip Garden Hose Nozzle	•



# NEW

# **Garden Hose Nozzles (continued)**

### **NFZG70 FEATURES:**

- Angle adjustable head with 180° rotation
- 28 in. wand to water hanging planters, new plantings and delicate flowers
- On/Off toggle switch with variable flow control and prevention of user fatigue
- 3 adjustable spray patterns: jet, mist, shower

- · Soft grip dial guard
- Durable outer housing
- · Lightweight soft grip handle







WATER AREA UP TO 2,400 SQ. FT.

Flexzilla<sup>™</sup> Oscillating Lawn Sprinklers are essential tools for watering your lawn or garden. Waters a range up to 2,400 sq. ft. using 18 durable plastic nozzles. The range adjustment collar allows you to set the precise coverage area to efficiently water your yard. Our proven design makes this sprinkler ideal for everyday watering needs.



### **COMMON FEATURES:**

- Range adjustment collar makes it easy to position water where you need it without wasting water on the sidewalk or driveway
- 18 plastic jet nozzles cover up to 2,400 sq. ft. in your lawn or garden
- · Clog resistant filter allows water to flow evenly
- · Nozzle cleaning tool and end plug
- Leak-free connections Rubber gasket provides secure, watertight connections to garden hoses

### **SFZG62 FEATURES:**

 Metal Base - Ensures the sprinkler stays in place and does not flip over during use.

Part No.	Description	Retail Packaging
SFZG61	Oscillating Lawn Sprinkler, 2,400 sq. ft.	•
SFZG62	Oscillating Lawn Sprinkler with Metal Base, 2,400 sq. ft.	•



### **Water Hose Nozzles**



- Precision flow port Inline connection allows water to flow directly, not up and through the handle – increases water flow, pressure and power by approximately 30%
- Multiple spray patterns Select from jet, fan, power or low flow spray perfect for any job in the shop, garage or home
- Ergonomic handle provides an easy grip for less user fatigue
- Machined aircraft aluminum barrel and Santoprene™ rubber handle and head
- Durable, non-marring outer cover that protects painted surfaces
- · Leak-free O-ring outlasts the competition
- Works with 1/2, 5/8 and 3/4 in. water hose



Flexzilla® Pro Water Hose





Flexzilla® Pro Water Hose is available in pre-assembled coils or in our Custom Hose Centers where the end user can fabricate a custom length hose for any application.

The field repair and custom length hose process takes



**CUT** – Remove damaged portion of hose or measure and cut desired length at 90° angle.



INSTALL – Slide spiral fitting and nut onto hose.Push hose onto fitting until hose reaches threads.



**TIGHTEN** – Tighten fitting nut until snug. Slide bend restrictor up and snap onto nut.



# **Custom Water Hose Center**





The Flexzilla® Pro Custom Water Hose Centers allow you to provide your customers with custom length hose. Using Flexzilla Pro reusable ends, you can quickly and easily create custom length hose assemblies on site. The Custom Water Hose Centers also include Flexzilla SwivelGrip® Garden lead-in hose assemblies.



SwivelGrip® Garden Lead-In hoses are not field repairable



# **Custom Water Hose Center (continued)**





Part No.	Description	Rack Quantity
	HFZWHC1 - Flexzilla® Pro Custom Water Hose Center	
HFZW58250YW	Flexzilla® Pro Water Hose, 5/8 in. x 250 ft. Spool, ZillaGreen™	3 ea.
RP900625F	Flexzilla® Pro Water Hose Female Reusable Fitting, 5/8 in.	30 ea.
RP900625M	Flexzilla® Pro Water Hose Male Reusable Fitting, 5/8 in.	30 ea.
HFZG503YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 3 ft.	10 ea.
HFZG510YWS	Flexzilla® Garden Lead-in Hose with SwivelGrip™, 5/8 in. x 10 ft.	20 ea.
HR-05	Custom Hose Center (Freestanding Rack)	1 ea.
	Parts also sold separately in standard pack quantities	



# **Water Hose Assemblies**







Flexzilla® Pro Water Hose was designed for professional use. It offers all the unique, efficient qualities of other Flexzilla hoses – it's lightweight, it lies flat, it's flexible in any weather, durable and abrasion-resistant and it will not kink when under water pressure. Also, it's easily repaired on the jobsite in a few simple steps. Plus, with our superior O-ring, you get a long-term, leak-free connection at the spigot. The Flexible Hybrid Polymer inner tube material is drinking water safe.

- Field Repairable Reusable anodized aircraft aluminum fittings
- Extreme all-weather flexibility
- · Lightweight, coils easily
- Won't kink under pressure
- Lays flat no memory
- · Durable outer cover resists abrasion, UV and mold
- Reinforced mid-layering provides extra strength
- Leak free connections A durable O-ring provides long lasting leak free connections
- Max. working pressure at 70°F: 150 psi
- Flexzilla Pro Reusable Fittings include bend reinforcement for increased flexibility. Reduces wear and tear, prolonging the life of the hose.
- Drinking water safe





Part No.	Hose I.D.	Hose Length	Fittings	Retail Packaging
HFZWP550	5/8 in.	50 ft.	3/4 in 11¹/₂ GHT	•
HFZWP575	5/8 in.	75 ft.	3/4 in 111/2 GHT	•
HFZWP5100	5/8 in.	100 ft.	3/4 in 11 <sup>1</sup> / <sub>2</sub> GHT	•



# Retractable Water Hose Reel with Levelwind™ Technology





Featuring Levelwind™ – Flexzilla's unique winding system that automatically layers hose back and forth across the reel ensuring that the hose is coiled smoothly, easilv...every time – and includes Flexzilla® water hose and lead-in hose.





### **FEATURES:**

- Latching Mode Switch Choose from latching hose every 3 ft. for extended use or switch to free run for immediate automatic rewinding
- Seven Position Locking Bracket —
  These reels can swivel freely on the mounting bracket up to 135° or can be locked into place using the locking brace. Up to seven different locking angles can be utilized (L8300-W)
- Adjustable Hose Stopper Increase or decrease the length of the hose that remains when hose is fully retracted
- Extra Large Swivel A 3/4 in. swivel reduces flow restriction and allows maximum flow
- Freestanding Base Portable Use freestanding or mounted on wall or ceiling. Flat base allows reel to rest on ground
- Built-In Handle For carrying ease
- Durable Construction Made from durable UV stabilized polypropylene
- Lead-in Hose Included 10 ft. x 3/4 in. x 11½ GHT (L8340FZLI)



### Retractable Water Hose Reels with Levelwind™ Technology

Part No.	Hose I.D.	Hose Length	Hose Material	Working Pressure @ 70°F	Reel Inlet	Weight	Retail Packaging	Assembled in USA
L8340FZ	1/2 in.	70 ft.	Flexible Hybrid Polymer	150 psi	3/4 in. – 11½ Male GHT	31 lbs.	•	•



# **Mounting Brackets**

### L8300-B FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 360° or can be locked into place using the locking brace
- Mounting options: high wall or bench

### L8300-W FEATURES:

- Includes a seven position locking bracket
- Reel can swivel freely on mounting bracket up to 135° or can be locked into place using the locking brace
- · Mounting options: wall or overhead ceiling



# **Pressure Washer Hose Assemblies**

Flexzilla® offers a revolutionary pressure washer hose that redefines flexibility. Unlike other pressure washer hose, Flexzilla stays flexible when pressurized during use and offers minimal memory when depressurized. It also lays flat and won't work against you before, during or after use.



Part No.	Hose I.D.	Hose Length	Fittings	Yoke/ Stem	Max. Working Pressure @ 70°F	Retail Packaging	Made in USA
HFZPW3425M	1/4 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3425M-4X	1/4 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3450M	1/4 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW3450M-3X	1/4 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW3525M	5/16 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3525M-4X	5/16 in.	25 ft.	M22	14mm	3,100 psi	•	•
HFZPW3550M	5/16 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW3550M-3X	5/16 in.	50 ft.	M22	14mm	3,100 psi	•	•
HFZPW36425M	1/4 in.	25 ft.	M22	14mm	3,600 psi	•	•
HFZPW36425M-5X	1/4 in.	25 ft.	M22	14mm	3,600 psi	•	•
HFZPW36450M	1/4 in.	50 ft.	M22	14mm	3,600 psi	•	•
HFZPW36450M-3X	1/4 in.	50 ft.	M22	14mm	3,600 psi	•	•
HFZPW40525M	5/16 in.	25 ft.	M22	14mm	4,000 psi	•	•
HFZPW40525M-5X	5/16 in.	25 ft.	M22	14mm	4,000 psi	•	•
HFZPW40550M	5/16 in.	50 ft.	M22	14mm	4,000 psi	•	
HFZPW40550M-3X	5/16 in.	50 ft.	M22	14mm	4,000 psi	•	•
HFZPW426050Q	3/8 in.	50 ft.	Integrated Quick Connect		4,600 psi	•	
HFZPW426050Q-3X	3/8 in.	50 ft.	Integrated Quick Connect		4,600 psi	•	•
HFZPW426100Q	3/8 in.	100 ft.	Integrated Quick Connect	-	4,600 psi	•	•
HFZPW426100Q-2X	3/8 in.	100 ft.	Integrated Quick Connect	_	4,600 psi	•	•
				e assembli	es respectively in a re		

- Extreme flexibility under pressure, from subzero to 140°F
- Made of Flexible Hybrid Polymer material
- Integral non-kink bend restrictor
- Cold water use only
- Available with M22 or Integrated Quick Connect fittings









# **LIGHTED PLUG**

Light up any work site with the lighted power indicator, ensuring you can always find the power source.

# **GLOW STRIPE**

Features a glow-in-the-dark stripe that runs the length of the cord.

# 




# **Extension Cords**

PRO

Flexzilla® Pro industrial grade extension cords are engineered to hold up to the toughest jobs. They are easy to coil and remain flexible in temperatures as low as -58°F and up to 140°F. Plus, the grounded plug includes a lighted power indicator which lets you know power is running through the cord. Flexzilla Pro Extension Cords are ideal for outdoor industrial grade applications.

- Extreme all-weather flexibility (-58°F to 140°F)
- · Abrasion and corrosion-resistant
- Glow-in-the-dark stripe
- Power indicator light
- Resists kinks and easy to coil
- Grounded plug
- · Water Resistant
- Flame Retardant
- Outdoor use
- cULus Listed

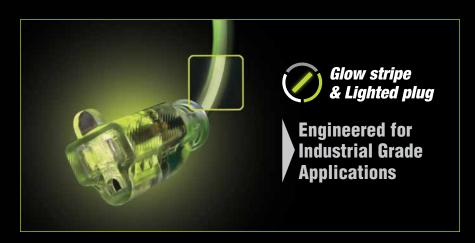







Part No.	Cord Length	Gauge	Retail Packaging
FZ512930	50 ft.	10 ga.	•
FZ512935	100 ft.	10 ga.	•
FZ512825	25 ft.	12 ga.	•
FZ512830	50 ft.	12 ga.	•
FZ512835	100 ft.	12 ga.	•
FZ512725	25 ft.	14 ga.	•
FZ512730	50 ft.	14 ga.	•
FZ512735	100 ft.	14 ga.	•


















# **NEW** Retractable Extension Cord Reels



Flexzilla® Retractable Extension Cord Reels come pre-loaded with 25 or 50 feet of oil-resistant cord, a lighted triple tap outlet and grounded 5 foot lead-in cord. Each reel also contains a circuit breaker with reset button, adjustable cord stopper, power indicator light, and a swivel mounting bracket. The reels lock the cord out in 1 foot increments. The impact resistant housing protects and stores the extension cord when not in use. These retractable reels are ideal for general, commercial and industrial use.



GAUGE	CORD LENGTH
16/3 AWG	25 FT.



# GAUGE CORD LENGTH 14/3 AWG 50 FT.

- Lighted triple tap outlet for plenty of capacity
- Circuit breaker with reset button prevents breaker from tripping and blown fuses
- · Reset circuit at reel
- Oil-Resistant AWG SJTOW cord flexible in low temperatures and resists the effects of oil, water and sunlight
- Swivel mounting bracket pivots in the direction of your work
- Reel can be mounted to wall or ceiling

- Cord locks out in 1 ft. increments
- Adjustable cord stopper ensures outlet is always within reach
- Power indicator light
- Grounded plug includes 5 ft. lead-in cord
- Impact resistant housing
- Recommended for dry, indoor locations
- cULus Listed





Part No.	Cord Length	Cord Gauge	Max. Watts	Max. Amps	Max. Voltage	Max. Hz	Retail Packaging
FZ8160253	25 ft.	16/3 AWG	1250W	10A	125V	60 Hz	•
F781/10503	50 ft	14/3 AWG	1625W	13Δ	125V	60 Hz	•



# **NEW** Retractable Extension Cord Reel

PRO

The Flexzilla® Pro Retractable Extension Cord Reel comes pre-loaded with 60 feet of cord, a lighted triple tap outlet and grounded 4.5 foot lead-in cord. The 12 gauge oil resistant cord allows you to power heavy-duty equipment in the shop or on the jobsite. The reel utilizes a self-leveling system, which winds the cord evenly as it automatically retracts. The reel also contains a circuit breaker with reset button, adjustable cord stopper, power indicator light, and a swivel mounting bracket. The reel locks the cord out in 2 foot increments. The impact resistant housing protects and stores the extension cord when not in use. This retractable reel is ideal for commercial and industrial use.

- Self-Leveling System winds the cord evenly
- · Lighted triple tap outlet for plenty of capacity
- Circuit breaker with reset button prevents breaker from tripping and blown fuses. Reset circuit at reel
- · Power indicator light
- Oil resistant 12/3 AWG SJTOW cord flexible in low temperatures and resists the effects of oil, water and sunlight
- Cord locks out in 2 ft. increments
- Adjustable cord stopper ensures outlet is always within reach
- Grounded plug includes 4.5 ft. lead-in cord
- Swivel mounting bracket pivots in the direction of your work. Reel can be mounted to wall or ceiling
- · Impact resistant housing
- Recommended for dry, indoor locations










GAUGE	CORD LENGTH
12/3 AWG	60 FT.

Part No.	Cord	Cord	Max.	Max.	Max.	Max.	Retail
	Length	Gauge	Watts	Amps	Voltage	Hz	Packaging
FZ8120603	60 ft.	12/3 AWG	1875W	15A	125V	60 Hz	•

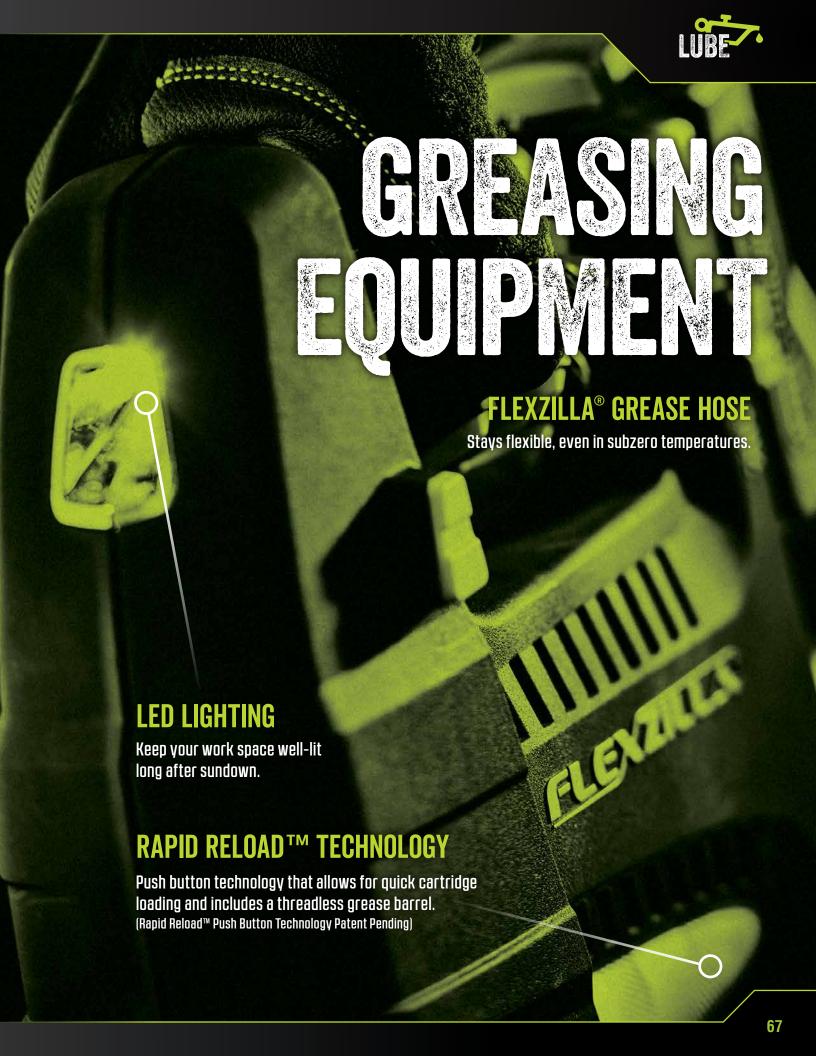



# **20V Cordless Grease Gun Kit**

There is a new creature dominating automotive shops, farms and worksites across the country. Introducing the Flexzilla® 20V Cordless Grease Gun Kit. It proves what can be accomplished when you combine over 30 years of grease gun experience from Legacy Manufacturing with the extreme performance of Flexzilla.



### **GREASE GUN FEATURES:**

- Rapid Reload™ Push Button Technology
   For fast cartridge loading
  - and unloading
  - Includes lightweight threadless grease barrel
- Flexzilla Grease Hose 42 in.
  - Extreme cold-weather flexibility (subzero to 140°F)
  - Non-kink bend restrictor
- LED Light Illuminate workspace
- Ergonomic Grip
- Non-slip Pads Stabilize gun when standing up and laying on its side. Ideal for tight spaces
- Hose Dock Secure and manage hose
- · Lightweight Aluminum Barrel with Firm Grip Knurling - For better grip and durability
- Positive T-Grip Follower Handle
- Pressure Relief Valve
- · 4-Jaw Coupler Provides quality connection, disconnection, and sealing to zerk
- Holds 14 oz. Grease Cartridge (Cartridge not included)
- Delivers up to 7,000 psi

# RAPID RELOA **PUSH BUTTON TECHNOLOGY**

- For fast cartridge loading

(Patent Pending)



Press to release barrel



Slide barrel out to reload

### **L1388LFZ KIT INCLUDES:**

- Flexzilla 20V Cordless Grease Gun
- Flexzilla Grease Hose 42 in.
- (2) 20V Lithium-Ion Rechargeable **Batteries**
- 1-Hour Quick Charger
- · Automatic Air Bleeder
- 4-Jaw Coupler
- Shoulder Strap
- Carrying Case





Part No.	Description	Retail Packaging
L1388LFZ	Flexzilla® 20V Cordless Grease Gun Kit	•
L1388LFZ-B	Flexzilla® 20V Lithium-Ion Rechargeable Battery for L1388LFZ	•
L1388LFZ-C	Flexzilla® 20V Lithium-Ion 1-Hour Quick Charger for L1388LFZ-B	•



### **Lever Action Grease Gun**

The highest standards of engineering and craftsmanship are built into every Flexzilla® Grease Gun making them the choice for those who work in rugged conditions. Flexzilla Grease Hoses are more flexible than traditional rubber or thermoplastic hoses and stay flexible, even in subzero temperatures.

### **Heavy Duty Lever Action Grease Gun - Variable Stroke**



### **FEATURES:**

- Flexzilla 18 in. Grease Hose -Extreme cold-weather flexibility (subzero to 140°F)
- Soft Barrel Grip Provides better ergonomic control and comfort
- · Heavy-Duty Cast Head Construction -For maximum durability and longer service life
- Durable Follower Rod And Spring -For consistent priming
- Bleeder Valve For purging unwanted air
  Variable Stroke Allows grease delivery in confined areas
- 4-Jaw Coupler Provides quality connection, disconnection, and sealing
- · 3-Way Loading Cartridge, bulk, filler nipple
- Wide Grip ClearanceHolds 14 oz. Grease Cartridge
- Includes 6 in. angled extension

Part No.	Retail Packaging
L1355FZ	•

# **Quick-Release Grease Coupler**

The Flexzilla™ Quick-Release Grease Coupler features a patented, innovative design which enables quick and easy connections to grease fittings, even in tight spaces. The Quick-Release Grease Coupler features a spring latch for positive engagement and allows for one-handed operation. When the fitting becomes pressurized, depress the thumb lever and release the coupler. No more stuck on couplers and broken grease fittings. Plus, the Quick-Release Grease Coupler eliminates grease spurts when disconnecting, keeping your workspace clean.

- 6-Jaw Coupler with high strength steel jaws provide improved clamping force on the zerk
- Releases easily under high pressure
- Spring latch for positive engagement
- Ergonomic thumb lever provides effortless one-handed coupling and uncoupling, even under pressure - no more struggling when removing coupler
- · Compact design is ideal for use in tight spaces, 2.9 in. long by 1.2 in. tall
- · Compatible with all sizes and forms of mounts, fits all SAE and metric zerk fittings
- For use with most manual, battery and air operated grease guns and pumps
- Patented design

Part No.	FNPT Fitting	Retail Packaging
L2050FZ	1/8 in.	•






# **Grease Hoses**



Flexzilla™ Grease Hoses are more flexible than traditional rubber or thermoplastic hoses and stay flexible, even in subzero temperatures.




- Extreme cold-weather flexibility10,000 psi working pressure
- For use with manual, battery or air operated grease guns
- Coupler sold separately



Part No.	Description	Hose I.D.	Hose Length	MNPT Fitting	Spring Guard	Retail Packaging
L2910FZ	Flexzilla® 12 in. Grease Hose	3/16 in.	12 in.	1/8 in.	-	•
L2910FZSP	Flexzilla® 12 in. Grease Hose w/ Spring Guard	3/16 in.	12 in.	1/8 in.	Yes	•
L2915FZ	Flexzilla® 18 in. Grease Hose	3/16 in.	18 in.	1/8 in.		•
L2915FZSP	Flexzilla® 18 in. Grease Hose w/ Spring Guard	3/16 in.	18 in.	1/8 in.	Yes	•
L2925FZ	Flexzilla® 36 in. Grease Hose	3/16 in.	36 in.	1/8 in.		•
L2925FZSP	Flexzilla® 36 in. Grease Hose w/ Spring Guard	3/16 in.	36 in.	1/8 in.	Yes	•
L2930FZSP	Flexzilla® 42 in. Grease Hose w/ Spring Guard	3/16 in.	42 in.	1/8 in.	Yes	•
L2950FZ	Flexzilla® 12 in. Grease Hose	1/8 in.	12 in.	1/8 in.	-	•
L2950FZSP	Flexzilla® 12 in. Grease Hose w/ Spring Guard	1/8 in.	12 in.	1/8 in.	Yes	•
L2955FZ	Flexzilla® 18 in. Grease Hose	1/8 in.	18 in.	1/8 in.	-	•
L2955FZSP	Flexzilla® 18 in. Grease Hose w/ Spring Guard	1/8 in.	18 in.	1/8 in.	Yes	•
L2965FZ	Flexzilla® 36 in. Grease Hose	1/8 in.	36 in.	1/8 in.	-	•
L2965FZSP	Flexzilla® 36 in. Grease Hose w/ Spring Guard	1/8 in.	36 in.	1/8 in.	Yes	•



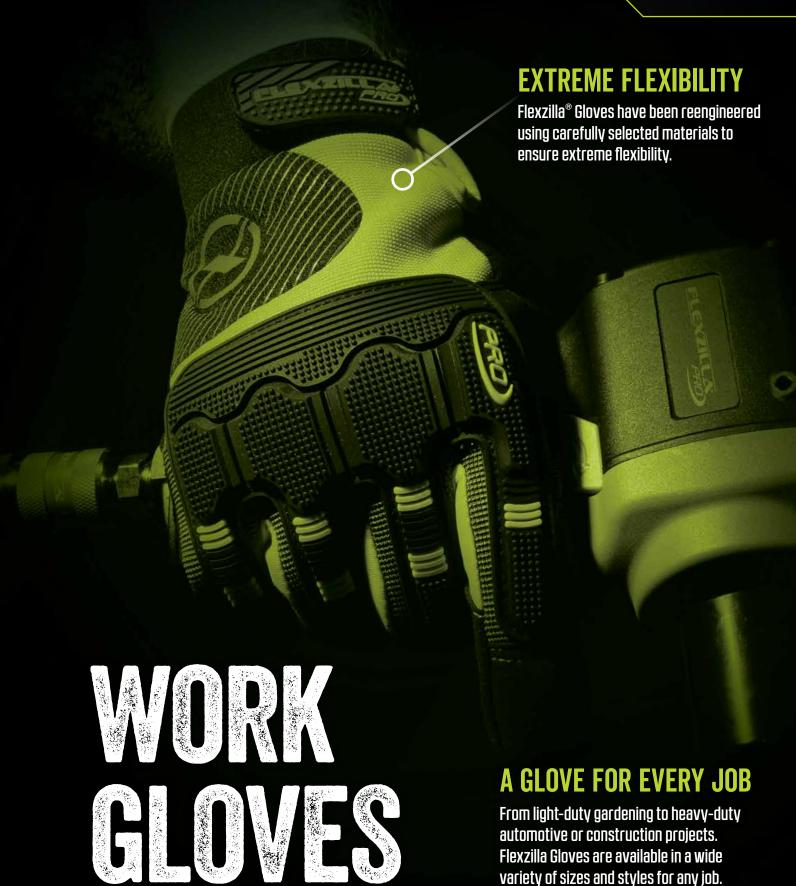



# **NEW**

### DEXTERITY Impact HD Pro Gloves HIGH

Redesigned from cuff to finger tips, Flexzilla® Gloves have been reengineered using carefully selected materials to ensure extreme flexibility, rugged durability and unrivaled comfort. Flexzilla has you covered, from light-duty gardening to heavy-duty automotive or construction projects. Flexzilla Gloves are available in a wide variety of sizes and styles for any job.



### **GH700P FEATURES:**

- Thermoplastic Rubber (TPR) knuckle and finger impact protection
- Touchscreen technology Thumb, index and middle fingers
  Durable, padded synthetic leather palm
- PVC palm padding
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Lycra panels between fingers for superior breathability
- · Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

# **TPR KNUCKLE AND FINGER**

# **IMPACT PROTECTION**

**IDEAL FOR:** Heavy Equipment, Construction, Demolition, Automotive, Towing

Part No.	Size	Men's
GH700PM	М	•
GH700PL	L	•
GH700PXL	XL	•
GH700PXXL	XXL	•



### NEW

### HIGH DEXTERITY Utility Gloves

### **GH100 FEATURES:**

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

### **IDEAL FOR:** General Tasks

Part No.	Size	Men's
GH100M	М	•
GH100L	L	•
GH100XL	XL	•
GH100XXL	XXL	•





### HIGH DEXTERITY General Purpose Gloves

### **GH300 FEATURES:**

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Neoprene wrist
- Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- · Machine washable Lay flat to dry

### **IDEAL FOR:** Multipurpose, Maintenance, Equipment, DIY

Part No.	Size	Men's
GH300M	M	•
GH300L	L	•







### DEXTERITY Fingerless Gloves HIGH

#### **GH330 FEATURES:**

- Finger pulls for quick and easy glove removalPolyurethane non-slip grip palm and thumb back
- Lightweight Lycra back Keeps hands cool and comfortable
- · 4-Way spandex knuckle reinforcement
- Terry cloth brow wipe
- · Neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

### **QUICK & EASY GLOVE REMOVAL FINGER PULLS**

IDEAL FOR: Cross-functional, Mechanic, Sports

Part No.	Size	Men's
GH330M	М	•
GH330XXL	XXL	•





### HIGH DEXTERITY FlexFit Gloves

### **GH360 FEATURES:**

- Touchscreen technology All fingers
- · Durable, padded polyurethane palm Extreme comfort and tactility
- Flexible spandex Keeps hands cool and comfortable
- Back of finger PVC reinforcement
- · Lycra panels between fingers for superior breathability
- Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

IDEAL FOR: Cross-functional, Mechanic, Sports, Driving

Part No.	Size	Men's
GH360M	М	•
GH360L	L	•
GH360XL	XL	•
GH360XXL	XXL	•





### HIGH DEXTERITY Zillanator™ Pro Gloves



#### **GH361P FEATURES:**

- Touchscreen technology Thumb, index and middle fingers
  Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- Neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

IDEAL FOR: Multipurpose, Mechanic, Contractor

Part No.	Size	Men's
GH361PM	М	•
GH361PL	L	•
GH361PXL	XL	•
GH361PXXL	XXL	•





### HIGH DEXTERITY Reflector Pro Gloves

### **GH400P FEATURES:**

- 3M<sup>™</sup> Scotchlite<sup>™</sup> Reflective Material on knuckle and fingertips
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- · Lycra panels between fingers for superior breathability
- Contoured neoprene wrist
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

3M™ SCOTCHLITE™

### REFLECTIVE MATERIAL

IDEAL FOR: Safety, Emergency, Construction, Towing

Part No.	Size	Men's
GH400PM	М	•
GH400PL	L	•
GH400PXL	XL	•





### HIGH DEXTERITY Water-Resistant Hybrid Grain Leather Pro Gloves

#### **GH460P FEATURES:**

- Water-resistant hybrid grain leather palm
- Touchscreen technology Thumb, index and middle fingers
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Durable, padded hybrid grain leather knuckle reinforcement
- Reinforced wear points: Fingertips and leather thumb saddle
- Terry cloth brow wipe
- Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit

IDEAL FOR: Construction, Contractor, Landscaping

Part No.	Size	Men's
GH460PM	М	•
GH460PL	L	•
GH460PXL	XL	•





### HIGH DEXTERITY General Purpose Winter Gloves

#### **GH500 FEATURES:**

- de Keeps hands warm and comfortable
- 3M<sup>™</sup> Thinsulate<sup>™</sup> liner 70g
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex
- · Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

### 3M™ THINSULATE™ LINER - 70G **KEEPS HANDS WARM**

IDEAL FOR: General Tasks, Maintenance, DIY

Part No.	Size	Men's
GH500L	L	•
GH500XL	XL	•





### HIGH DEXTERITY Multipurpose Winter Gloves

### **GH501 FEATURES:**

- t Keeps hands warm and comfortable
- 3M<sup>™</sup> Thinsulate<sup>™</sup> liner 70g
- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex
- · Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- Terry cloth brow wipe
- · Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

3M™ THINSULATE™ LINER - 70G **KEEPS HANDS WARM** 

**IDEAL FOR:** Multipurpose, Maintenance, Equipment, DIY

Part No.	Size	Men's
GH501L	L	•
GH501XL	XL	•







### DEXTERITY Utility Garden Gloves HIGH

WOMEN

#### **GH201 FEATURES:**

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- Padded knuckle reinforcement
- Reinforced wear points: Fingertips and thumb saddle
- · Lycra panels between fingers for superior breathability
- · Shirred elastic wrist
- Thermoplastic Rubber (TPR) pull tab
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

Part No.	Size	Women's
GH201S	S	•
GH201M	М	•
GH201L	L	•





### HIGH DEXTERITY General Purpose Garden Gloves WOMEN

### **GH202 FEATURES:**

- Touchscreen technology Thumb, index and middle fingers
- Durable, padded synthetic leather palm
- Breathable 4-Way spandex Keeps hands cool and comfortable
- · Padded knuckle reinforcement
- · Reinforced wear points: Fingertips and thumb saddle
- Neoprene wrist
- · Lycra panels between fingers for superior breathability
- Adjustable Thermoplastic Rubber (TPR) wrist closure and pull tab for secure fit
- Machine washable Lay flat to dry

**IDEAL FOR:** Garden, Landscaping, General Tasks

Part No.	Size	Women's
GH202S	S	•
GH202M	М	•
GH202L	L	•



### **MEN'S SIZING COATED-PALM DIP GLOVES**





BLACK = LARGE

ZILLAGREEN = XL

GRAY = XXL



PALM-COATED DIP ZillaGrip™ Polyurethane Dip Gloves



### **GC300 FEATURES:**

- Durable and abrasion-resistant polyurethane palm coating
- Excellent grip on wet and oily surfaces
- Superior comfort
- Breathable 100% polyester shellElastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

### **EXCELLENT GRIP WET & OILY SURFACES**

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools

**AVAILABLE IN SINGLE & 2-PAIR PACKS** 

Part No.	Size	Men's
GC300M	М	•
GC300L	L	•
GC300M-2X	М	•
GC300L-2X	L	•
GC300XL-2X	XL	•





### **Nitrile Dip Gloves** PALM-COATED DIP

#### **GC100 FEATURES:**

- Touchscreen technology All fingers
- · Durable and abrasion-resistant nitrile palm coating
- Excellent grip on oily surfaces
- Breathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
  Machine washable Lay flat to dry

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

### **AVAILABLE IN SINGLE & 6-PAIR PACKS**

Part No.	Size	Men's
GC100L	L	•
GC100XL	XL	•
GC100L-6X	L	•
GC100XL-6X	XL	•
GC100L-6X-12Q	L	•
GC100XL-6X-12Q	XL	•

Part nos. with a -12Q suffix include (12) 6-Pair Packs in a retail merchandiser display





#### **Cut-Resistant Pro Sandy Nitrile Dip Gloves** PALM-COATED DIP

#### **GC160P FEATURES:**

- 360° ANSI level 5 cut-resistance protects hands
- Breathable 100% polyester shell
- Touchscreen technology All fingers
- · Durable and abrasion-resistant sandy nitrile palm coating
- Non-slip grip in wet, dry and oily conditions
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

### **CUT-RESISTANT** 360° ANSI LEVEL 5

**IDEAL FOR:** Safety, Glass, Power Tools, Handling Blades & Knives, Handling Broken Glass, Maintenance & Repair, Equipment Operation, Landscaping, DIY, Manufacturing, Construction

Part No.	Size	Men's
GC160PL	L	•
GC160PXL	XL	•







### PALM-COATED DIP Impact Pro Sandy Nitrile Dip Gloves



#### **GC161P FEATURES:**

- Thermoplastic Rubber (TPR) knuckle and finger protection
- Touchscreen technology All fingers
- Durable and abrasion-resistant sandy nitrile palm coating
- Non-slip grip in wet, dry and oily conditions
- Breathable 100% polyester shellElastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

### **TPR KNUCKLE AND FINGER IMPACT PROTECTION**

IDEAL FOR: Automotive, Mechanical, Equipment, Power & Hand Tools, Construction, Demolition

Part No.	Size	Men's
GC161PL	L	•
GC161PXL	XL	•





#### **Foam Latex Dip Gloves** PALM-COATED DIP

#### **GC220 FEATURES:**

- · Durable and abrasion-resistant foam latex palm coating
- Breathable polyester shell
- · Textured for enhanced durability and grip
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

### **TEXTURED PALM COATING**

### **ENHANCED DURABILITY & GRIP**

IDEAL FOR: Automotive, Mechanical, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC220L	L	•
GC220XL	XL	•





### **Crinkle Latex Dip Gloves** PALM-COATED DIP

### **GC240 FEATURES:**

- Durable and abrasion-resistant crinkle latex palm coating
- · Heavy texture channels away liquids to keep a positive grip
- Excellent grip on wet and dry surfacesBreathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

### **WET & DRY SURFACES**

### **EXCELLENT GRIP**

IDEAL FOR: Garden, Landscaping, Power & Hand Tools, DIY

Part No.	Size	Men's
GC240L	L	•
GC240XL	XL	•







### PALM-COATED DIP 3/4 Crinkle Latex Dip Pro Gloves



### **GC241P FEATURES:**

- Durable and abrasion-resistant 3/4 crinkle latex palm dip
- Heavy texture channels away liquids to keep a positive grip
- Excellent grip on wet and dry surfaces
- Breathable 100% polyester shell
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

## EXCELLENT GRIP WET & OILY SURFACES

IDEAL FOR: Automotive, Construction, DIY

Part No.	Size	Men's
GC241PM	М	•
GC241PL	L	•
GC241PXL	XL	•



# WOMEN'S SIZING COATED-PALM DIP GLOVES



ZILLAGREEN = SMALL



WHITE = MEDIUM



**BLACK = LARGE** 



### PALM-COATED DIP Foam Latex Dip Garden Gloves

WOMEN

#### **GC221 FEATURES:**

- · Durable and abrasion-resistant foam latex palm coating
- Breathable polyester shell
- · Textured for enhanced durability and grip
- · Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

TEXTURED PALM COATING		
<b>ENHANCED DURABILITY &amp; GRIP</b>		
Part No.	Size	Women's
GC221M	М	•
GC221L	L	•





### PALM-COATED DIP Bamboo Crinkle Latex Dip Garden Gloves

### **GC290 FEATURES:**

- Sustainable bamboo shell with nylon and lycra fibers
- · Naturally cool and comfortable
- · Crinkle latex palm coating
- Textured channels away liquids and to a keep positive grip
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

IDEAL FOR: Garden, Landscaping, General Tasks

## SUSTAINABLE BAMBOO SHELL COOL & COMFORTABLE

Part No.	Size	Women's
GC290M	М	
GC290L	L	•







### PALM-COATED DIP 3/4 Nitrile Dip Winter Gloves

#### **GC180 FEATURES:**

- 3/4 Nitrile coating Textured and double dipped for water resistance
- Heavyweight napped terry knit shell with acrylic lining
- 15-Gauge nylon and high polyethylene outer liner
- Durable and abrasion-resistant with excellent grip on oily surfaces
- · Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

## OILY SURFACES EXCELLENT GRIP

**IDEAL FOR:** Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC180L	L	•
GC180XL	XL	•





### PALM-COATED DIP Full Nitrile Dip Winter Gloves

### **GC181 FEATURES:**

- Full nitrile coating Textured and double dipped for water resistance
- Heavyweight napped terry knit shell with acrylic lining
- 15-Gauge nylon and high polyethylene outer liner
- Durable and abrasion-resistant with excellent grip on oily surfaces
- Elastic band cuff keeps out dirt and debris
- Machine washable Lay flat to dry

## TEXTURED & DOUBLE DIPPED WATER-RESISTANT COATING

**IDEAL FOR:** Automotive, Mechanical, Equipment, Power & Hand Tools, General Purpose, DIY

Part No.	Size	Men's
GC181L	L	•
GC181XL	XL	•





### **HEAVY DUTY CLEANING**

### NEW

### **Neoprene Long Cuff Pro Gloves**

#### **GC400P FEATURES:**

- Reusable neoprene material for multiple wears
- · Protects against hazardous materials
- · Raised non-slip pattern palm and fingertips
- · Cotton flocked interior lining for comfort and easy on and off flexibility
- 13 in. long cuff design protects wrists and forearms
- Water-resistant

**IDEAL FOR:** Chemical Processing, Commercial, Degreasing, Fishing, Galvanizing, General Purpose, Oil Handling, Petrochemical, Mechanical

## PROTECTS WRISTS & FOREARMS AGAINST HAZARDOUS MATERIALS

Part No.	Size	Men's
GC400PM	М	•
GC400PL	L	•
GC400PXL	XL	•



### **HEAVY DUTY CLEANING**



### **PVC Long Cuff Pro Gloves**

### **GC500P FEATURES:**

- Reusable food grade PVC material for multiple wears
- Protects against hazardous materials
- Non-slip textured palm
- · Cotton interior lining for comfort and easy on and off flexibility
- 12 in. long cuff design protects wrists and forearms
- · Water-resistant

**IDEAL FOR:** Degreasing, Acids & Caustics, Agriculture, Construction, Chemical Handling, Food, General Maintenance, Oil Handling, Petrochemical

## BUILT FOR MULTIPLE WEARS FOOD GRADE PVC

Part No.	Size	Men's
GC500PL	L	•
GC500PXL	XL	•





### **NEW**

### LEATHER

### **Grain Leather Gloves**

### **FEATURES:**

- Grain leather construction
- · Excellent comfort and unimpeded dexterity
- Naturally durable and breathable
- · Withstands moisture without becoming stiff
- Reinforced suede palm patch
  Keystone thumb design
  Shirred elastic wrist

### **EXCELLENT COMFORT**

### **UNIMPEDED DEXTERITY**

**IDEAL FOR:** Construction, Contractor, Landscaping, Garden, General Tasks

Part No.	Size	Men's	Women's
GL20M	M	•	
GL20L	L	•	
GL20XL	XL	•	





### **Water Hoses, Reels and Nozzles**



#### **Items Shown:**

- Garden Hose Nozzles
- 3-Piece Nozzle Kit with Quick Connections
- Quick-Connect Garden Hose Fittings
- Pro Water Hose Nozzles
- Garden Lead-in Hoses
- Pressure Washer Hoses
- SwivelGrip® Garden Hoses
- Garden Hoses
- Garden Hose Kits with Quick Connect Attachments
- Pro Water Hoses Field Repairable
- Water Hose Reels

### **Items Shown:**

- Colors™ SwivelGrip® Garden Hoses
  Available in Colors:
- Brown Mulch
- Red Clay

### **Greasing Equipment, Blow Guns and Assorted Products**





### **Items Shown:**

- Grease Hoses
- Grease Guns Lever Action
- Grease Guns 20V Cordless Kit

### **Items Shown:**

- Blow Guns and Kits
- Pro Extension Cords
- 11-Piece Air Hose Compressor Kits
- Truck Tire Inflator Kits
- Air Hose Reels with Levelwind™ Technology
- Extension Cord Reels

### **Air Tool Kits, Hoses and Assorted Products**





### **Items Shown:**

- Recoil Hoses
- Whip Hoses
- Tire Inflators
- Pro High Flow Couplers and Plugs
- Pro Reusable Fittings and Splicers
- Air Hoses
- Pro Air Hoses Field Repairable
- Air Hose Reels
- Extension Cord Reels

### **Items Shown:**

- Pro High Flow Couplers and Plugs
- Pro Custom Length Whip Hoses
- Pro Mini Impact Wrench
- Pro Air Hoses Field Repairable

### **Hose Reel Display Rack, Reels, and Air Hoses**

### **Items Shown:**

- Gondola Mounted Hose Reel Display Rack (HR-20)
- Air Hoses
- Air Hose Reels

### Gondola Mounted Hose Reel Display Rack: Allows up to five Legacy or

Allows up to five Legacy or Flexzilla reels to be mounted for in-store display.

COMPATIBLE WITH 4 FT. LOZIER GONDOLA SHELVING



### **HR-20 FEATURES:**

- Unique mounting patterns accomodate any Legacy or Flexzilla hose reel
- Interlocking tabs compatible with 4 ft. Lozier gondola shelving uprights
- Secondary mount holes for attaching to other structures



### **Work Gloves**

- Items Shown:

   Garden Gloves

   Leather Gloves

   High Dexterity Gloves


   Winter Gloves

   Palm-Coated Dip Gloves


   Gloves PDQs



### **Custom Hose Centers**

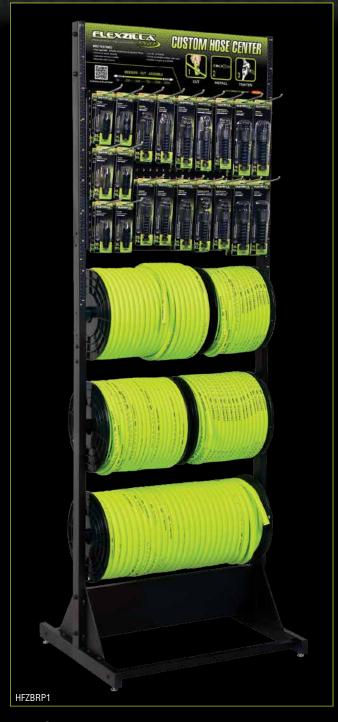


- Items Shown:
   Reusable Fittings and Splicers
   Bulk Air Hose
   Bulk Water Hose

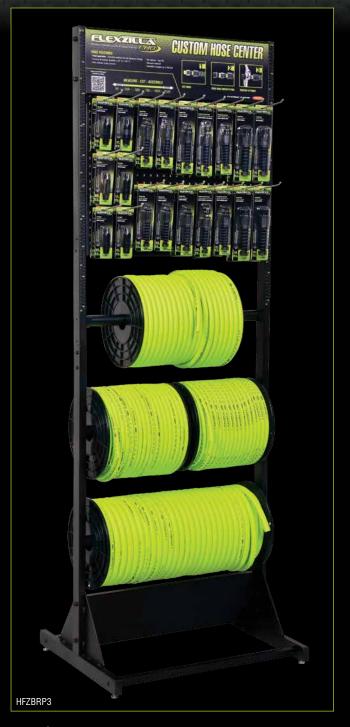

- Items Shown:
   Reusable Fittings and Splicers
   Bulk Air Hose
   Bulk Water Hose

### **Custom Water Hose Centers**

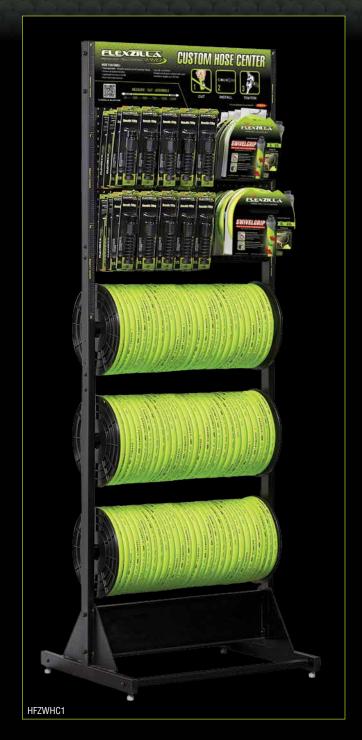

- Items Shown:
   Reusable Water Fittings
   SwivelGrip® Lead-in Hoses
   Bulk Water Hose

## NDEX

Part No.	Pg.	Part No.	Pg.	Part No.	Pg.
A5	17	AG1006FZ	43	FS10V080V1	10
A53416FZ	37	AG1012FZ	43	FS10V120V1	10
A53416FZ-X	37	AG1016FZ-N	43	FXS07V080V1	9
A53426FZ	37	AG1090FZ	43	FXS07V080V3-208	9
A53426FZ-X	37	AG1091FZ	43	FXS07V080V3-230	9
A53430FZ-2PK	37	AG1092FZ	43	FXS10V080V1	9
A53430FZ-X	37	AG1093FZ	43	FXS10V080V3-208	9
A53440FZ-2PK	37	AG1099FZ	43	FXS10V080V3-230	9
A53440FZBS	37	AG1102FZ	42	FXS10V120V1	9
A53440FZBS-X	37	AG1200FZKIT	42	FXS10V120V3-208	9
A53440FZ-X	37	AG1202FZ	42	FXS10V120V3-230	9
A53452FZ	38	AG1402FZ	42	FZ512725	64
A53457FZ	38	AG1500FZKIT	42	FZ512730	64
A53458FZ	38	AG1502FZ	42	FZ512735	64
A53616FZ	37	AG934FZ	43	FZ512825	64
A53616FZ-X	37	AL2000FZ	47	FZ512830	64
A53626FZ	37	AL2025FZ-1	47	FZ512835	64
A53626FZ-X	37	AL2025FZ-2	47	FZ512930	64
A53630FZ-2PK	37	AT1475FZ	45	FZ512935	64
A53630FZ-X	37	CB20100F	12	FZ8120603	66
A53640FZ-2PK	37	CB20200F	12	FZ8140503	65
A53640FZ-X	37	CF10050F	12	FZ8160253	65
A53657FZ	38	DRAIN013	11	GC100L	80
A55618FZ	40	FDRCF1150030	11	GC100L-6X	80
A55628FZ	40	FDRCF1150058	11	GC100L-6X-12Q	80
A55630FZ	40	FILTER057	11	GC100XL	80
A55640FZ	40	FILTER107KIT	11	GC100XL-6X	80
A55656FZ	40	FILTERKIT011	11	GC100XL-6X-12Q	80
A55818FZ	40	FILTERKIT012	11	GC160PL	80
A55828FZ	40	FKIT011A	11	GC160PXL	80
A55830FZ	40	FKIT026A	11	GC161PL	81
A55840FZ	40	FS050V80Y1	10	GC161PXL	81
A55856FZ	40	FS05V080I1	9	GC180L	85
A86666FZ	38	FS07V080Y1	10	GC180XL	85

Part No.	Pg.
GC181L	85
GC181XL	85
GC220L	82
GC220XL	82
GC221L	84
GC221M	84
GC240L	82
GC240XL	82
GC241PL	83
GC241PM	83
GC241PXL	83
GC290L	84
GC290M	84
GC300L	79
GC300L-2X	79
GC300M	79
GC300M-2X	79
GC300XL-2X	79
GC400PL	86
GC400PM	86
GC400PXL	86
GC500PL	86
GC500PXL	86
GH100L	73
GH100M	73
GH100XL	73
GH100XXL	73
GH201L	78
GH201M	78
GH201S	78
GH202L	78
GH202M	78
GH202S	78
GH300L	73

000000	600
Part No.	Pg.
GH300M	73
GH330M	74
GH330XXL	74
GH360L	74
GH360M	74
GH360XL	74
GH360XXL	74
GH361PL	75
GH361PM	75
GH361PXL	75
GH361PXXL	75
GH400PL	76
GH400PM	76
GH400PXL	76
GH460PL	76
GH460PM	76
GH460PXL	76
GH500L	77
GH500XL	77
GH501L	77
GH501XL	77
GH700PL	72
GH700PM	72
GH700PXL	72
GH700PXXL	72
GL20L	87
GL20M	87
GL20XL	87
HFZ1202YW3S	16
HFZ1202YW4S	16
HFZ1204YW3S	16
HFZ1204YW4S	16
HFZ1206YW3S	16
HFZ1206YW4S	16

A 2 2 2 X	1 1 1 1 1
Part No.	Pg.
HFZ1208YW3S	16
HFZ12100YW3	14
HFZ12100YW4	14
HFZ12250YW	20, 21
HFZ1225YW3	14
HFZ1250YW3	14
HFZ1250YW4	14
HFZ1405YW2B	16
HFZ14100YW2	14
HFZ14100YW2-3X	14
HFZ14100YW2-D	15
HFZ14250YW	20, 21
HFZ1425YW2	14
HFZ1425YW2-D	15
HFZ1450YW2	14
HFZ1450YW2-D	15
HFZ3802YW2B	16
HFZ3804YW2B	16
HFZ3806YW2B	16
HFZ38100YW2	14
HFZ38100YW2-D	15
HFZ38250YW	20, 21
HFZ3825YW2	14
HFZ3825YW2-5X	14
HFZ3825YW2-D	15
HFZ3835YW2	14
HFZ3835YW2-D	15
HFZ3850YW2	14
HFZ3850YW2-10X	14
HFZ3850YW2-3X	14
HFZ3850YW2-D	15
HFZ3850YW3	14
HFZBRP1	19, 94
HFZBRP3	19, 94

## INDEX

HFZC550BRS         50         HFZGK14         53         HFZPW426100Q         62           HFZC550TCS         50         HFZGK01         54         HFZPW426100Q-2X         62           HFZCLBI1D         16         HFZPH1100YW2-D         23         HFZWW5250YW         20, 21, 80           HFZG120500N         52         HFZPH14100YW2-D         23         HFZWP5100         60           HFZG503YWS         49, 60         HFZP14150YW2         22         HFZWP550         60           HFZG505YW         51         HFZP1450YW2-D         23         HFZWP575         60           HFZG505YWS         49         HFZP1450YW2-D         23         HFCD5         20, 60           HFZG5100YW-36T         51         HFZP38100YW2-D         23         HR-05         20, 60           HFZG510YWS         49         HFZP3850YW2-D         23         HS0ATORS001         11           HFZG510YWS         49         HFZP3855YW2-D         23         L1388LFZ         68           HFZG510YWS         49         HFZP3855YW2-D         23         L1388LFZ         68           HFZG550YWS         49         HFZP3855YW2-D         23         L2950FZ         69           HFZG550YWS         4	Part No.	Pg.	Part No.	Pg.	8	Part No.	Pg.
HFZCLB11D         16         HFZP14100YW2         22         HFZW58250YW         20, 21, 60           HFZCLB11D-3X         16         HFZP14100YW2-D         23         HFZWHC1         59, 60, 95           HFZG12050QN         52         HFZP1425YW2         22         HFZWF5100         60           HFZG503YW         51         HFZP1425YW2-D         23         HFZWF550         60           HFZG505YW         51         HFZP1450YW2-D         23         HFZWF575         60           HFZG5100YW         51         HFZP3806YW2B         22         HFZWF575         60           HFZG5100YW         51         HFZP3806YW2B         23         HR-05         20, 60           HFZG5100YW         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS         49         HFZP3825YW2         22         L1385LFZ         68           HFZG510YWS         49, 60         HFZP3835YW2         22         L1388LFZ-C         68           HFZG525YWS         49         HFZPW3850YW2-D         23         L2910FZ         70           HFZG550YW-48T         51         HFZPW3455M         62         L2910FZ         70           HFZG550YW-48T         51	HFZC550BRS	50	HFZGAK14	53	X	HFZPW426100Q	62
HFZCLB11D-3X         16         HFZP14100YW2-D         23         HFZWHC1         59, 60, 95           HFZG12050QN         52         HFZP1425YW2         22         HFZWP5100         60           HFZG503YW         51         HFZP1425YW2-D         23         HFZWP550         60           HFZG503YWS         49, 60         HFZP1450YW2-D         23         HFZWP575         60           HFZG505YW         51         HFZP3806YW2B         23         HGH2-FZ         47           HFZG5100YW         51         HFZP38100YW2-D         23         HR-05         20, 60           HFZG5100YW-36T         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS-6X         49         HFZP3825YW2-D         23         ISOLATORS001         11           HFZG510YWS-6X         49         HFZP3835YW2-D         23         L1388LFZ         68           HFZG510YWS-6X         49         HFZP3850YW2-D         23         L1388LFZ-B         68           HFZG550YWS-40X         49         HFZPW3850YW2-D         23         L2906FZ         69           HFZG550YWS-40X         49         HFZPW3425M         62         L2910FZ         70           HFZG550YWS-30X<	HFZC550TCS	50	HFZGSK01	54		HFZPW426100Q-2X	62
HFZG12050NN         52         HFZP1425YW2         22         HFZWP550         60           HFZG503YW         51         HFZP1425YW2-D         23         HFZWP550         60           HFZG503YWS         49. 60         HFZP1450YW2-D         23         HFZWP575         60           HFZG505YW         51         HFZP3806YW2B         23         HR-05         20. 60           HFZG5100YW         51         HFZP38100YW2         22         HR-20         92           HFZG5100YW-36T         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS         49         HFZP3825YW2-D         23         L1385FZ         69           HFZG510YW         51         HFZP385YW2-D         23         L1388LFZ         68           HFZG510YWS         49         HFZP385YW2-D         23         L1388LFZ         68           HFZG510YWS-6X         49         HFZP3850YW2-D         23         L2910FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YWS-40X         49         HFZPW3450M         62         L2910FZ         70           HFZG550YWS-30X         49         HFZ	HFZCLB11D	16	HFZP14100YW2	22		HFZW58250YW	20, 21, 60
HFZG503YW         51         HFZP1425YW2-D         23         HFZWP550         60           HFZG503YWS         49, 60         HFZP1450YW2         22         HFZWP575         60           HFZG505YW         51         HFZP1450YW2-D         23         HGH2-FZ         47           HFZG505YWS         49         HFZP38100YW2         22         HR-05         20, 60           HFZG5100YW         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG5100YWS         49         HFZP3825YW2         22         L1355FZ         69           HFZG510YWS         49         HFZP3825YW2-D         23         L1388LFZ         68           HFZG510YWS-6X         49         HFZP3855YW2-D         23         L1388LFZ-B         68           HFZG525YW         51         HFZP3850YW2-D         23         L2930FZ         69           HFZG525YWS-80X         49         HFZP3850YW2-D         23         L2910FZ         69           HFZG550YWS-80X         49         HFZPW3425M         62         L2910FZ         70           HFZG550YWS-30X         49         HFZPW3525M         62         L2915FZ         70           HFZG550YWS-40X         49	HFZCLB11D-3X	16	HFZP14100YW2-D	23		HFZWHC1	59, 60, 95
HFZG503YWS         49, 60         HFZP1450YW2         22         HFZWP575         60           HFZG505YW         51         HFZP1450YW2-D         23         HGH2-FZ         47           HFZG505YWS         49         HFZP3806YW2B         23         HR-05         20, 60           HFZG5100YW         51         HFZP38100YW2         22         HR-20         92           HFZG5100YWS         49         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS         49         HFZP3825YW2         22         L1388LFZ         68           HFZG510YWS         49, 60         HFZP3835YW2         22         L1388LFZ-B         68           HFZG510YWS-6X         49         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZP3850YW2-D         23         L2050FZ         69           HFZG555YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG555YWS         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS-30X         49         HFZPW3552MA         62         L2925FZ         70           HFZG555YWS-0X         49         HFZPW3	HFZG12050QN	52	HFZP1425YW2	22		HFZWP5100	60
HFZGS05YW         51         HFZP1450YW2-D         23         HGH2-FZ         47           HFZGS05YWS         49         HFZP3806YW2B         23         HR-05         20,60           HFZG5100YW         51         HFZP38100YW2         22         HR-20         92           HFZG5100YWS-6T         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS         49         HFZP3825YW2         22         L1355FZ         69           HFZG510YWS         49,60         HFZP3835YW2         22         L1388LFZ-B         68           HFZG525YW         51         HFZP3850YW2         22         L1388LFZ-C         68           HFZG525YWS         49         HFZP3850YW2-D         23         L2050FZ         69           HFZG555YWS         51         HFZPW3450M         62         L2910FZ         70           HFZG550YW-48T         51         HFZPW3450M         62         L2910FZ         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2915FZSP         70           HFZG550YWS-40X         49         HFZPW3525M-3X         62         L2925FZSP         70           HFZG575YWS-40X         51         H	HFZG503YW	51	HFZP1425YW2-D	23		HFZWP550	60
HFZGS05YWS         49         HFZP3806YW2B         23         HR-05         20,60           HFZG5100YW         51         HFZP38100YW2         22         HR-20         92           HFZG5100YW-36T         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG510YWS         49         HFZP3825YW2         22         L1355FZ         69           HFZG510YWS         49,60         HFZP3835YW2         22         L1388LFZ-B         68           HFZG525YW         51         HFZP3850YW2         22         L1388LFZ-B         68           HFZG525YWS         49         HFZP3850YW2         22         L1388LFZ-C         68           HFZG555YWS         51         HFZPW3425M         62         L2910FZ         70           HFZG550YWS         51         HFZPW3450M         62         L2910FZ         70           HFZG550YWS         49         HFZPW3450M         62         L2915FZ         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2915FZSP         70           HFZG557YWS-40X         49         HFZPW3525M         62         L2925FZSP         70           HFZG6575YW-48T         51         HFZPW364	HFZG503YWS	49, 60	HFZP1450YW2	22		HFZWP575	60
HFZG5100YW   51	HFZG505YW	51	HFZP1450YW2-D	23		HGH2-FZ	47
HFZG5100YW-36T         51         HFZP38100YW2-D         23         ISOLATORS001         11           HFZG5100YWS         49         HFZP3825YW2         22         L1355FZ         69           HFZG510YW         51         HFZP3825YW2-D         23         L1388LFZ-C         68           HFZG510YWS         49, 60         HFZP3850YW2         22         L1388LFZ-C         68           HFZG525YW         51         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YW         51         HFZP3850YW2-D         23         L2910FZ         70           HFZG550YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW-48T         51         HFZPW3450M         62         L2910FZ         70           HFZG550YWS-40X         49         HFZPW3450M-3X         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3550M-4X         62         L2925FZ         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2930FZSP         70           HFZG675YW-48T         51         HFZPW36425M         62         L2950FZ         70           HFZG6600YW         51	HFZG505YWS	49	HFZP3806YW2B	23		HR-05	20, 60
HFZG5100YWS         49         HFZP3825YW2         22         L1355FZ         69           HFZG510YW         51         HFZP3825YW2-D         23         L1388LFZ         68           HFZG510YWS         49, 60         HFZP3835YW2         22         L1388LFZ-C         68           HFZG510YWS-6X         49         HFZP3850YW2         22         L1388LFZ-C         68           HFZG525YW         51         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW-48T         51         HFZPW3450M         62         L2910FZSP         70           HFZG550YWS-40X         49         HFZPW3450M-3X         62         L2915FZ         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2925FZ         70           HFZG575YW         51         HFZPW3525M         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW36425M         62         L2950FZ         70           HFZG6607YW         51         HFZPW364	HFZG5100YW	51	HFZP38100YW2	22		HR-20	92
HFZG510YW         51         HFZP3825YW2-D         23         L1388LFZ         68           HFZG510YWS         49, 60         HFZP3835YW2         22         L1388LFZ-B         68           HFZG510YWS-6X         49         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YW-48T         51         HFZPW3450M-3X         62         L2915FZ         70           HFZG550YWS-40X         49         HFZPW3450M-3X         62         L2915FZSP         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZ         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2950FZ         70           HFZG675YW-48T         51         HFZPW36425M-5X         62         L2950FZ         70           HFZG675YW-5         49         HFZPW36450M-3X         62         L2950FZ         70           HFZG6600YW         51 <td>HFZG5100YW-36T</td> <td>51</td> <td>HFZP38100YW2-D</td> <td>23</td> <td></td> <td>ISOLATORS001</td> <td>11</td>	HFZG5100YW-36T	51	HFZP38100YW2-D	23		ISOLATORS001	11
HFZG510YWS         49,60         HFZP3835YW2         22         L1388LFZ-B         68           HFZG510YWS-6X         49         HFZP3850YW2         22         L1388LFZ-C         68           HFZG525YW         51         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YW-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS-30X         49         HFZPW3450M-3X         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZ         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2930FZSP         70           HFZG575YWS         49         HFZPW36425M         62         L2950FZ         70           HFZG675YWS         51         HFZPW36425M         62         L2950FZ         70           HFZG66100YW         51         HFZPW36425M-5X         62         L2955FZSP         70           HFZG675YW         51         HF	HFZG5100YWS	49	HFZP3825YW2	22		L1355FZ	69
HFZG510YWS-6X         49         HFZP3850YW2         22         L1388LFZ-C         68           HFZG525YW         51         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YW-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS-30X         49         HFZPW3525M         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW         51         HFZPW3550M-3X         62         L2925FZSP         70           HFZG575YWS         49         HFZPW3550M-3X         62         L2950FZ         70           HFZG575YWS         49         HFZPW3550M-3X         62         L2950FZ         70           HFZG675YWS         49         HFZPW36425M         62         L2950FZ         70           HFZG66100YW         51         HFZPW36425M-5X         62         L2955FZ         70           HFZG6650YW         51         HFZPW40550	HFZG510YW	51	HFZP3825YW2-D	23		L1388LFZ	68
HFZG525YW         51         HFZP3850YW2-D         23         L2050FZ         69           HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YWS-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS-30X         49         HFZPW3450M-3X         62         L2915FZSP         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2925FZ         70           HFZG557YW         51         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2930FZSP         70           HFZG6100YW         51         HFZPW36425M-5X         62         L2950FZSP         70           HFZG650YW         51         HFZPW36425M-5X         62         L2955FZ         70           HFZG66100YW         51         HFZPW36450M-3X         62         L2955FZ         70           HFZG675YW         51         HFZPW366450M-3X         62         L2965FZ         70           HFZGA60         54         HFZPW	HFZG510YWS	49, 60	HFZP3835YW2	22	_	L1388LFZ-B	68
HFZG525YWS         49         HFZPW3425M         62         L2910FZ         70           HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YW-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS         49         HFZPW3450M-3X         62         L2925FZSP         70           HFZG550YWS-40X         49         HFZPW3525M         62         L2925FZSP         70           HFZG555YW-48T         51         HFZPW3550M-3X         62         L2930FZSP         70           HFZG575YWS         49         HFZPW3550M-3X         62         L2950FZ         70           HFZG6100YW         51         HFZPW36425M         62         L2950FZ         70           HFZG650YW         51         HFZPW36450M-3X         62         L2955FZSP         70           HFZG650YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZG6650YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZGA60         54         HFZPW40525M-5X         62         L2965FZ         70           HFZGAK01         52         HFZPW40550M-3X	HFZG510YWS-6X	49	HFZP3850YW2	22		L1388LFZ-C	68
HFZG550YW         51         HFZPW3425M-4X         62         L2910FZSP         70           HFZG550YW-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS         49         HFZPW3450M-3X         62         L2915FZSP         70           HFZG550YWS-30X         49         HFZPW3525M         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW         51         HFZPW3550M         62         L2930FZSP         70           HFZG575YWS         49         HFZPW3550M-3X         62         L2950FZ         70           HFZG675YWS         49         HFZPW36425M         62         L2950FZ         70           HFZG6100YW         51         HFZPW36425M-5X         62         L2950FZ         70           HFZG650YW         51         HFZPW36450M-3X         62         L2955FZ         70           HFZG6650YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZGAK01         52         HFZPW40525M         62         L2965FZSP         70           HFZGAK02         52         HFZPW40550M-3X<	HFZG525YW	51	HFZP3850YW2-D	23	_	L2050FZ	69
HFZG550YW-48T         51         HFZPW3450M         62         L2915FZ         70           HFZG550YWS         49         HFZPW3450M-3X         62         L2915FZSP         70           HFZG550YWS-30X         49         HFZPW3525M         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW         51         HFZPW3550M         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2950FZ         70           HFZG6100YW         51         HFZPW36425M         62         L2950FZ         70           HFZG6100YW         51         HFZPW36450M-5X         62         L2955FZ         70           HFZG650YW         51         HFZPW36450M-3X         62         L2955FZ         70           HFZG675YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZGAK01         52         HFZPW40525M-5X         62         L2965FZSP         70           HFZGAK02         52         HFZPW40525M-5X         62         L8011FZ         30           HFZGAK11         53         HFZPW40550M-	HFZG525YWS	49	HFZPW3425M	62		L2910FZ	70
HFZG550YWS       49       HFZPW3450M-3X       62       L2915FZSP       70         HFZG550YWS-30X       49       HFZPW3525M       62       L2925FZ       70         HFZG550YWS-40X       49       HFZPW3525M-4X       62       L2925FZSP       70         HFZG575YW       51       HFZPW3550M       62       L2930FZSP       70         HFZG575YW-48T       51       HFZPW3550M-3X       62       L2950FZ       70         HFZG675YWS       49       HFZPW36425M       62       L2950FZSP       70         HFZG6100YW       51       HFZPW36425M-5X       62       L2950FZSP       70         HFZG650YW       51       HFZPW36450M       62       L2955FZSP       70         HFZGA60YW       51       HFZPW36450M-3X       62       L2955FZSP       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8041FZ       30	HFZG550YW	51	HFZPW3425M-4X	62	_	L2910FZSP	70
HFZG550YWS-30X         49         HFZPW3525M         62         L2925FZ         70           HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW         51         HFZPW3550M         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2950FZ         70           HFZG675YWS         49         HFZPW36425M         62         L2950FZSP         70           HFZG6100YW         51         HFZPW36425M-5X         62         L2955FZ         70           HFZG650YW         51         HFZPW36450M         62         L2955FZSP         70           HFZGA600         54         HFZPW36450M-3X         62         L2965FZ         70           HFZGAK01         52         HFZPW40525M         62         L2965FZSP         70           HFZGAK02         52         HFZPW40550M-3X         62         L8011FZ         30           HFZGAK11         53         HFZPW40550M-3X         62         L8041FZ         30           HFZGAK12         53         HFZPW426050Q         62         L8041FZ         30	HFZG550YW-48T	51	HFZPW3450M	62		L2915FZ	70
HFZG550YWS-40X         49         HFZPW3525M-4X         62         L2925FZSP         70           HFZG575YW         51         HFZPW3550M         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2950FZ         70           HFZG575YWS         49         HFZPW36425M         62         L2950FZSP         70           HFZG6100YW         51         HFZPW36425M-5X         62         L2955FZ         70           HFZG650YW         51         HFZPW36450M         62         L2955FZSP         70           HFZG675YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZGA60         54         HFZPW40525M         62         L2965FZSP         70           HFZGAK01         52         HFZPW40525M-5X         62         L8011FZ         30           HFZGAK11         53         HFZPW40550M-3X         62         L8011FZLI         34           HFZPW426050Q         62         L8041FZ         30           HFZGAK12         53         HFZPW426050Q         62         L8041FZ         27	HFZG550YWS	49	HFZPW3450M-3X	62	_	L2915FZSP	70
HFZG575YW         51         HFZPW3550M         62         L2930FZSP         70           HFZG575YW-48T         51         HFZPW3550M-3X         62         L2950FZ         70           HFZG575YWS         49         HFZPW36425M         62         L2950FZSP         70           HFZG6100YW         51         HFZPW36425M-5X         62         L2955FZ         70           HFZG650YW         51         HFZPW36450M         62         L2965FZSP         70           HFZG675YW         51         HFZPW36450M-3X         62         L2965FZ         70           HFZGAK01         52         HFZPW40525M         62         L2965FZSP         70           HFZGAK02         52         HFZPW40525M-5X         62         L8011FZ         30           HFZGAK11         53         HFZPW40550M-3X         62         L8041FZ         30           HFZGAK12         53         HFZPW426050Q         62         L8041FZ         30	HFZG550YWS-30X	49	HFZPW3525M	62		L2925FZ	70
HFZG575YW-48T       51       HFZPW3550M-3X       62       L2950FZ       70         HFZG575YWS       49       HFZPW36425M       62       L2950FZSP       70         HFZG6100YW       51       HFZPW36425M-5X       62       L2955FZ       70         HFZG650YW       51       HFZPW36450M       62       L2955FZSP       70         HFZG675YW       51       HFZPW36450M-3X       62       L2965FZ       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG550YWS-40X	49	HFZPW3525M-4X	62	_	L2925FZSP	70
HFZG575YWS       49       HFZPW36425M       62       L2950FZSP       70         HFZG6100YW       51       HFZPW36425M-5X       62       L2955FZ       70         HFZG650YW       51       HFZPW36450M       62       L2955FZSP       70         HFZG675YW       51       HFZPW36450M-3X       62       L2965FZ       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG575YW	51	HFZPW3550M	62		L2930FZSP	70
HFZG6100YW       51       HFZPW36425M-5X       62       L2955FZ       70         HFZG650YW       51       HFZPW36450M       62       L2955FZSP       70         HFZG675YW       51       HFZPW36450M-3X       62       L2965FZ       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG575YW-48T	51	HFZPW3550M-3X	62		L2950FZ	70
HFZG650YW       51       HFZPW36450M       62       L2955FZSP       70         HFZG675YW       51       HFZPW36450M-3X       62       L2965FZ       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG575YWS	49	HFZPW36425M	62		L2950FZSP	70
HFZG675YW       51       HFZPW36450M-3X       62       L2965FZ       70         HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG6100YW	51	HFZPW36425M-5X	62		L2955FZ	70
HFZGA60       54       HFZPW40525M       62       L2965FZSP       70         HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG650YW	51	HFZPW36450M	62		L2955FZSP	70
HFZGAK01       52       HFZPW40525M-5X       62       L8011FZ       30         HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZG675YW	51	HFZPW36450M-3X	62		L2965FZ	70
HFZGAK02       52       HFZPW40550M       62       L8011FZLI       34         HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZGA60	54	HFZPW40525M	62		L2965FZSP	70
HFZGAK11       53       HFZPW40550M-3X       62       L8041FZ       30         HFZGAK12       53       HFZPW426050Q       62       L8232FZ       27	HFZGAK01	52	HFZPW40525M-5X	62		L8011FZ	30
HFZGAK12 53 HFZPW426050Q 62 L8232FZ 27	HFZGAK02	52	HFZPW40550M	62		L8011FZLI	34
	HFZGAK11	53	HFZPW40550M-3X	62		L8041FZ	30
HFZGAK13 53 HFZPW426050Q-3X 62 L8250FZ 27	HFZGAK12	53	HFZPW426050Q	62		L8232FZ	27
	HFZGAK13	53	HFZPW426050Q-3X	62		L8250FZ	27

	3/7/7/
Part No.	Pg.
L8250FZLI	34
L8251FZP	26
L8251FZPLI	34
L8300-B	25, 61
L8300-W	25, 61
L8305FZ	25
L8305FZLI	34
L8306FZ	25
L8335FZ	25
L8335FZLI	34
L8340FZ	61
L8340FZLI	61
L8550FZ	31
L8560FZ	31
L8603FZ	28
L8611FZ	28
L8611FZLI	34
L8650FZ	32
L8651FZ	33
L8651FZLI	34
L8652FZ	32
L8654FZ	33
L8654FZLI	34
L8711FZ	29
L8741FZ	29
LP1410AFZ	17
LP1415AFZ	17
LP1420AFZ	17
LP1425AFZ	17
MAINKIT008A	11
NFZG01-N	57
NFZG02-N	57
NFZG21	55
NFZG51	55

10 1 1	3 C N	4.2	21 15	
Part No.			Pg.	
NFZG52			55	
NFZG61			55	
NFZG62			55	
NFZG63			55	
NFZG64			56	
NFZG65			56	
NFZG66			56	
NFZG67			56	
NFZG68			56	
NFZG69			56	
NFZG70			57	
OILFZ004			11	
OILPIS102	2Q		11	
RP900250	)		20, 2	1
RP900250	)BS		20, 2	1
RP900250	)S		21	
RP900375	ō		20, 2	1
RP900375	BS		20, 2	1
RP900375	SS.		21	
RP900500	)		20	
RP900500	)S		20, 2	1
RP900625	ōF		20, 2	1, 60
RP900625	δM		20, 2	1, 60
RP901250	)		20, 2	1
RP901375	<u>,                                      </u>		20, 2	1
RP901500	)		20, 2	1
SFZG61			57	
SFZG62			57	



# FLEXZILLA®

## PREMIUM HOSES, TOOLS & EQUIPMENT



See the full line of Flexzilla® products at:

flexzilla.com



### **Legacy Manufacturing Company**

6509 Partners Ave Marion, IA 52302 phone: 319-373-7305

toll-free: 800-645-8258 email: info@flexzilla.com

legacymfg.com flexzilla.com

#### See Flexzilla in Action!

















### Published: January 1, 2022 Revised June 15, 2022

Flexzilla and The Flexzilla Stylized X both are registered trademarks of Weems Industries, Inc. The color CHARTREUSE is a registered trademark of Weems Industries, Inc., including but not limited to U.S. Reg. Nos. 4,827,169 & 5,293,921. SwivelGrip is a registered trademark of Weems Industries, Inc.

SwivelGrip® Patent Pending D Legacy Manufacturing Co.
Colors is a trademark of Weems Industries, Inc.

ColorConnex is a registered trademark of Weems Industries, Inc.

Legacy is a trademark of Weems Industries, Inc. ColorConnex: U.S. Pat. No. 7,980,599 & 8,430,431 and Canadian Registration No. 2,575,170

Lock-n-Load: U.S. Pat. No. 8,297,476 B2 and Canadian Pat. No. 02743126

Copyright © 2022 Legacy Manufacturing Co. All Rights Reserved.