

OMEGA COMPRESSORS

Contractor and Professional Air Compressors



For us, it's not just business. It's personal.

Contractor and Professional Air Compressors

CONTRACTOR SERIES - OIL LESS DIRECT DRIVE

- Compact Design and lightweight.
- Die cast aluminum pump with cast iron sleeves and stainless steel valves for longer life.
- Oil Less means maintenance free.
- All electrical units draw 15 amps or under.
- Manual reset for overload protection.
- Outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers.
- CSA approved.
- Factory tested prior to shipment.
- 1 year limited manufacturer's warranty.
- For professional, farm, home and hobbyists.
Not intended for industrial applications.



MB-2000G



LA-5702



LA-5708



PN-1004L



LA-5721 Top View



LA-5721



MA-9004

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	VOLTAGE/ PHASE	AMP DRAW @125 PSI	TANK SIZE	PUMP RPM	WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI							LENGTH	WIDTH	HEIGHT
MB-2000G	0.5	0.5	1.4	0.9	135	115V/1PH	5	N/A	1720	10	11	6	8
PN-1004L	1	0.5	1.4	0.9	135	115V/1PH	5	1	1720	17	12	15	12
LA-5702	1.5	0.75	3.0	2.3	135	115V/1PH	8	2	1720	35	19	7	17
LA-5708	1.5	0.75	3.0	2.3	135	115V/1PH	8	6.6	1720	55	23	11	24
LA-5721	1.5	0.75	3.0	2.3	135	115V/1PH	8	2	1720	40	16	16	15
MA-9004	1.5	1.5	5.8	4.4	135	115V/1PH	15	4	1720	63	15	15	21

OMEGA
COMPRESSORS

Contractor and Professional Air Compressors

CONTRACTOR SERIES - OIL LUBE DIRECT DRIVE - 1720 RPM

- Compact Design and lightweight.
 - Quiet running and low 1720 pump rpm.
 - Splash lubrication.
 - Die cast aluminum pump with cast iron sleeves and stainless steel valves for longer life.
 - All electrical units draw 15 amps or under.
 - Manual reset for overload protection.
 - Outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers.
 - Filter silencer included with replacement element.
 - CSA approved.
 - Pump oil included.
 - Factory tested prior to shipment.
 - 1 year limited manufacturer's warranty.
 - For professional, farm, home and hobbyists.
- Not intended for industrial applications.



DD-2022HP



DD-1004



DD-1503



DD-2004V



DD-2022B



DD-2022S



DD-2008

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	VOLTAGE/ PHASE	AMP DRAW @125 PSI	TANK SIZE	PUMP RPM	WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI							LENGTH	WIDTH	HEIGHT
DD-1004	1	1	4.5	4.0	135	115V/1PH	15	4	1720	65	16	16	23
DD-1503	1.5	1.5	6.0	4.6	135	115V/1PH	14	3.2	1720	55	22	9	23
DD-2004V	2	1.5	6.0	4.6	135	115V/1PH	15	3	1720	70	16	19	16
DD-2008	2	1.5	6.0	4.6	135	115V/1PH	15	8	1720	65	23	14	25
DD-2022B	2	1.5	6.0	4.6	135	115V/1PH	15	4	1720	80	21	20	20
DD-2022HP	2	1.5	6.0	4.6	135	115V/1PH	15	2 X 2	1720	84	23.5	20	20 (37.5 WITH HANDLE)
DD-2022S	2	1.5	6.0	4.6	135	115V/1PH	15	2 X 2	1720	80	19	20	19
DD-3008	3	2	7.3	6	135	115V/1PH	15	8	1720	96	25	14	27

Contractor and Professional Air Compressors

CONTRACTOR SERIES - OIL LUBE DIRECT DRIVE - 3450 RPM

- Compact Design and lightweight.
 - Splash lubrication.
 - Die cast aluminum pump with cast iron sleeves and stainless steel valves for longer life.
 - All electrical units draw 15 amps or under.
 - Manual reset for overload protection.
 - Outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers.
 - CSA approved.
 - Filter silencer with replacement filter element.
 - Pump oil included.
 - Factory tested prior to shipment.
 - 1 year limited manufacturer's warranty.
 - For professional, farm, home and hobbyists.
- Not intended for industrial applications.



DP-2004V
Top View



DP-2004V



DP-2022S



DP-2022W



ND-1008



DP-3008



ND-1003

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	VOLTAGE/ PHASE	AMP DRAW @125 PSI	TANK SIZE	PUMP RPM	WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI							LENGTH	WIDTH	HEIGHT
ND-1003	1	1	4.5	4.0	135	115V/1PH	13	3.2	3450	58	21	9	23
ND-1008	1	1	4.5	4.0	135	115V/1PH	13	6.6	3450	65	24	14	25
DP-2004V	2	1.5	6.0	4.6	135	115V/1PH	12	3.2	3450	70	16	19	16
DP-2022S	2	1.5	6.0	4.6	135	115V/1PH	12	4	3450	80	19	20	19
DP-2022W	2	1.5	6.0	4.6	135	115V/1PH	15	4	3450	84	22	19	20 (37.5 WITH HANDLE)
DP-3008	3	2	7.3	6.0	135	115V/1PH	15	6.6	3450	73	23	14	25

OMEGA
COMPRESSORS

Contractor and Professional Air Compressors



PUK-1508MDC



PUK-2008MDC



PUK-2020MDC



PUK-1520MDC

CONTRACTOR SERIES - ELECTRIC BELT DRIVEN OIL LUBE

- Durable cast iron pumps.
- Stainless steel valves for longer life.
- Ball Bearing crankshaft.
- Splash lubrication.
- Flywheels designed for excellent pump cooling.
- Manual reset for overload protection.
- Dual Controls - Start/Stop with pressure switch or constant speed operation.
- Outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers.
- Totally enclosed belt guard.
- Filter silencers with replacement filter element.
- CSA approved.
- Pump oil included. Oil drain extensions included for pump.
- Factory tested prior to shipment.
- 1 year limited manufacturer's warranty.
- For professional contractors and farm use. Not intended for industrial applications.

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	VOLTAGE/ PHASE	AMP DRAW @125 PSI	TANK SIZE	MODEL	PUMP			WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI						CYLINDER	STAGE	RPM		LENGTH	WIDTH	HEIGHT
PUK-1508MDC	1.5	1.5	6.6	6.0	135	115V/1PH	15	8	PUK-50	V-2	1	1100	210	44	18	24
PUK-1520MDC	1.5	1.5	6.6	6.0	135	115V/1PH	15	20	PUK-50	V-2	1	1100	238	47	22	29
PUK-2008MDC	2	2	9.5	8.0	135	115V/1PH	19	8	PUK-60	V-2	1	900	215	44	18	24
PUK-2020MDC	2	2	9.5	8.0	135	115V/1PH	19	20	PUK-60	V-2	1	900	310	47	22	36

OMEGA
COMPRESSORS

Contractor and Professional Air Compressors

CONTRACTOR SERIES - GAS BELT DRIVEN OIL LUBE

- Durable cast iron pumps.
 - Stainless steel valves for longer life.
 - Ball Bearing crankshaft.
 - Splash lubrication.
 - Flywheels designed for excellent pump cooling.
 - Outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers.
 - Totally enclosed belt guard.
 - Filter silencers with replacement filter element.
 - Equipped with Honda gas engine.
 - Idle down throttle control to reduce fuel consumption when air is not in demand.
 - Pump and Engine oil included. Oil drain extensions included for pump and engine.
 - Oil level sight gauge.
 - Factory tested prior to shipment.
 - 1 year limited manufacturer's warranty.
 - For professional contractors and farm use.
- Not intended for industrial applications.



PUK-6508MDC



PUK-5508G



PUK-5520G



TUE-8008GE
PUK-8008GE



PUK-9008G



PUK-9020G

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	HONDA ENGINE	AMP DRAW @125 PSI	TANK SIZE	MODEL	PUMP			WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI						CYLINDER	STAGE	RPM		LENGTH	WIDTH	HEIGHT
PUK-5508G	5.5	5.5	12.5	10.5	135	5.5 HP GAS	N/A	8	PUK-60	V-2	1	1100	185	48	20	28
PUK-5520G	5.5	5.5	12.5	10.5	135	5.5 HP GAS	N/A	20	PUK-60	V-2	1	1100	200	41	20	32
PUK-6508G	5.5	5.5	16.5	14.0	135	5.5 HP GAS	N/A	8	PUK-65	V-3	1	900	225	48	20	28
PUK-8008GE	8	8	20.6	17.6	135	8 HP GAS	N/A	8	PUK-65	V-3	1	1100	250	48	20	28
PUK-9008G	9	9	20.6	17.6	135	9 HP GAS	N/A	8	PUK-65	V-3	1	1100	250	48	20	28
PUK-9020G	9	9	20.6	17.6	135	9 HP GAS	N/A	20	PUK-65	V-3	1	1100	310	47	22	36

MODEL	HORSEPOWER		CFM		MAX PSI	HONDA ENGINE	AMP DRAW @125 PSI	TANK SIZE	MODEL	PUMP			WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 140 PSI	140 PSI	175 PSI						CYLINDER	STAGE	RPM		LENGTH	WIDTH	HEIGHT
TUE-8008GE	8	8	15.6	12.5	175	8 HP GAS	N/A	8	TUE-50	V-3	2	1100	250	48	20	28

Note: PUK-8008GE and TUE-8008GE equipped with Electric Start

Contractor and Professional Air Compressors



PK-1008



PK-2008



PK-3011



PK-5020



PP-6060V



PK-5020VP





PK-6560V

PROFESSIONAL SERIES - BELT DRIVEN OIL LUBE

- Quiet Operation.
- Durable belt driven cast iron pumps.
- Stainless steel valves for longer life.
- Ball Bearing crankshaft.
- Splash lubrication.
- Flywheels designed for excellent pump cooling.
- Manual reset for overload protection.
- Portable outfits equipped with regulator, pressure gauge, pressure switch with on/off and manifold with universal couplers. (PK-1008 - PK-5020VP)
- Totally enclosed belt guard.
- Filter silencers with replacement filter element.
- Fully assembled - Require handle and wheel attachment (PK-1008 - PK-5020VP)
- CSA approved
- Pump oil included. Oil drain extensions included for pump.
- Oil level sight gauge.
- Factory tested prior to shipment.
- 1 year limited manufacturer's warranty.
- For professional contractors, automotive and farm use. Not intended for industrial applications.

Specifications

MODEL	HORSEPOWER		CFM		MAX PSI	VOLTAGE/ PHASE	AMP DRAW @125 PSI	TANK SIZE	MODEL	PUMP			WEIGHT LBS.	DIMENSIONS (INCHES)		
	PEAK	RUNNING @ 90 PSI	90 PSI	125 PSI						CYLINDER	STAGE	RPM		LENGTH	WIDTH	HEIGHT
PK-1008	1	0.5	2.2	1.7	135	115V/1PH	10	8	PK-10	1	1	800	85	24	14	24
PK-2008	2	1	4.0	3.2	135	115V/1PH	14	8	PK-20	1	1	900	95	27	14	24
PK-3011	3	1.5	6.0	5.3	135	115V/1PH	14	11	PK-30	1	1	1100	125	30	14	27
PK-5020	5	2	7.8	6.4	135	115V/1PH	15	20	PK-50	V-2	1	1100	185	40	18	29
PK-5020VP	5	2	7.8	6.4	135	115V/1PH	15	20	PK-50	V-2	1	1100	200	20	20	44
PP-6060V	6	3	12.5	11.0	125	230V/1PH	15	60	CK-30	V-2	1	950	300	27	22	65
PK-6560V	6.5	5	20.0	18.0	125	230V/1PH	22	60	CK-40	V-3	1	950	330	27	22	65

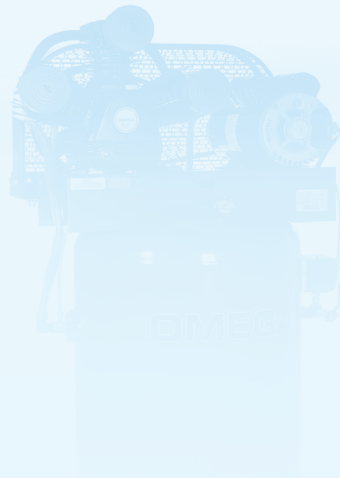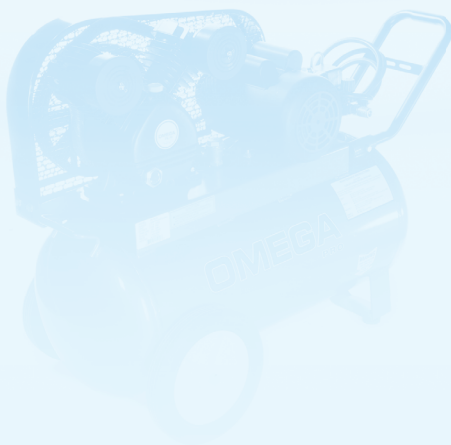

Compressed Air Accessories

Aluminum Air Piping

Ball Valves

Check Valves

Compressed Air Filters

Compressor Oil

Compressor Pumps

Desiccant Air Dryers

Electric Motors

Electronic Auto Drains

Filter Elements

Filter - Regulators - Lubricators

Flex Hose Connectors

Gauges

Magnetic Starters

Oil Monitors

Oil/Water Separators

Pilot Valves

Pneumatic Auto Drains

Pressure Switches

Refrigerated Air Dryers

Remote Air Receivers


Safety Valves

Service Parts

Throttle Controls

Vibration Isolators

Water Separators

1 year limited warranty 

OMEGA

COMPRESSORS

Distributed by:

63 Morrow Rd.
Barrie, ON Canada L4N 3V7
Tel: 800-668-8448 or (705) 721-9500
Fax: (705) 721-8646
Email: info@omegacompressors.com
www.omegacompressors.com

OMEGA COMPRESSORS

Climate Control Air Compressors



For us, it's not just business. It's personal.

Climate Control Air Compressors

CLIMATE CONTROL SERIES - SIMPLEX TANK MOUNTED

- Quiet operation.
- Heavy duty single and two stage high efficiency air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Low pump rpm for less oil carryover, longevity and durability
- Flywheels designed for excellent pump cooling.
- All units factory set at 70-90 psi with heavy duty pressure switch.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- All motors are rigid base constructed of heavy steel or cast iron, continuous duty, 1800rpm, ODP
- Specify voltage upon ordering. (1/2HP-3HP 115V/1PH, 1/2HP-10HP 230V/1PH) (1/2HP-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer’s warranty.
- For applications such as climate control, laboratories and dental clinics
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Mounted and wired Starter with CSA approval.
- Specialty units and voltages available upon request.



CC-75120, CC-100120

Climate Control Air Compressors

CLIMATE CONTROL SERIES - SIMPLEX TANK MOUNTED

Specifications - Horizontal Tank Mounted Units

MODEL	HP	MOTOR RPM	CFM (FAD)* 90 PSI	MAX PSI	TANK SIZE	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
												LENGTH	WIDTH	HEIGHT
CC-0530	1/2	1725	2.4	125	30	PK-50	V-2	1	509	1/2"	224	50	19	33
CC-07530	3/4	1725	3.4	125	30	PK-50	V-2	1	694	1/2"	228	50	19	33
CC-0130	1	1725	4.5	125	30	PK-50	V-2	1	942	1/2"	251	50	19	33
CC-0160	1	1725	4.5	125	60	PK-50	V-2	1	942	3/4"	329	56	22	40
CC-01530	1.5	1725	6.7	125	30	CK-40	V-3	1	420	1/2"	261	50	19	38
CC-01560	1.5	1725	6.7	125	60	CK-40	V-3	1	420	3/4"	330	56	22	43
CC-0230	2	1725	9.2	125	30	CK-40	V-3	1	544	1/2"	261	50	19	38
CC-0260	2	1725	9.2	125	60	CK-40	V-3	1	544	3/4"	339	56	22	43
CC-0360	3	1725	13.0	125	60	CT-50	V-2	2	686	3/4"	452	56	22	46
CC-0380	3	1725	13.0	125	80	CT-50	V-2	2	686	3/4"	480	72	22	47
CC-5080	5	1725	20.0	125	80	TK-100	V-3	2	571	3/4"	672	72	22	50
CC-50120	5	1725	20.0	125	120	TK-100	V-3	2	571	3/4"	785	75	27	53
CC-7580	7.5	1725	28.5	125	80	TK-100	V-3	2	630	3/4"	721	72	22	50
CC-75120	7.5	1725	28.5	125	120	TK-100	V-3	2	630	3/4"	834	75	27	53
CC-100120	10	1725	36.1	125	120	TK-100	V-3	2	845	3/4"	903	75	27	53
CC-100240	10	1725	36.1	125	240	TK-100	V-3	2	845	1"	1218	92	33	59
CC-150240	15	1725	53.1	125	240	TK-150	V-3	2	730	1"	1527	92	33	64
CC-200240	20	1725	91.0	125	240	TUK-300	V-4	2	595	1"	1802	92	33	63
CC-250240	25	1725	102.0	125	240	TUK-300	V-4	2	720	1"	1882	92	33	63
CC-300240	30	1725	117.5	125	240	TUK-300	V-4	2	850	1"	1934	92	33	63

Specifications and data subject to change.
*Notes: CFM (FAD) = CFM Free Air Delivery



CC-0130

Climate Control Air Compressors

CLIMATE CONTROL SERIES - BASE MOUNTED

- Quiet operation.
- Heavy duty single and two stage high efficiency air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Low pump rpm for less oil carryover, longevity and durability
- Flywheels designed for excellent pump cooling.
- All units factory set at 70-90 psi with heavy duty pressure switch.
- All units equipped with liquid filled gauge, snubber and flex hose.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All motors are rigid base constructed of heavy steel or cast iron, continuous duty, 1800rpm, ODP
- Specify voltage upon ordering. (1/2HP-3HP 115V/1PH, 1/2HP-10HP 230V/1PH) (1/2HP-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer’s warranty.
- For applications such as climate control, laboratories and dental clinics
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Belt guard aftercooler.
 - Mounted and wired Starter with CSA approval.
- Specialty units and voltages available upon request.



CC-0200



CC-5000, CC-7500, CC-100000

Climate Control Air Compressors

CLIMATE CONTROL SERIES - BASE MOUNTED

Specifications - Horizontal Tank Mounted Units

MODEL	HP	MOTOR RPM	CFM (FAD)* 90 PSI	MAX PSI	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED** Air Receiver
CC-0500	1/2	1725	2.4	125	PK-50	V-2	1	509	1/2"	150	27	17-1/4	17	AR-V30R-PF
CC-07500	3/4	1725	3.4	125	PK-50	V-2	1	694	1/2"	154	27	17-1/4	17	AR-V30R-PF
CC-0100	1	1725	4.5	125	PK-50	V-2	1	942	1/2"	177	27	17-1/4	17	AR-V60R-PF
CC-01500	1.5	1725	6.7	125	CK-40	V-3	1	420	1/2"	187	29	17-1/4	19	AR-V60R-PF
CC-0200	2	1725	9.2	125	CK-40	V-3	1	544	1/2"	187	29	17-1/4	19	AR-V60R-PF
CC-0300	3	1725	13.0	125	CT-50	V-2	2	686	3/4"	325	36	20	29	AR-V80R-PF
CC-5000	5	1725	20.0	125	TK-100	V-3	2	571	3/4"	492	41	24	31	AR-V120R-PF
CC-7500	7.5	1725	28.5	125	TK-100	V-3	2	630	1"	541	41	24	31	AR-V120R-PF
CC-100000	10	1725	36.1	125	TK-100	V-3	2	845	1"	610	41	24	31	AR-V120R-PF
CC-150000	15	1725	53.1	125	TK-150	V-3	2	730	1-1/2"	919	62	25	37	AR-V240R-PF
CC-200000	20	1725	91.0	125	TUK-300	V-4	2	595	2"	1194	63	35	39	AR-V240R-PF
CC-250000	25	1725	102.0	125	TUK-300	V-4	2	720	2"	1274	63	35	39	AR-V240R-PF
CC-300000	30	1725	117.5	125	TUK-300	V-4	2	850	2"	1326	63	35	39	AR-V240R-PF

Specifications and data subject to change.
*Notes: CFM (FAD) = CFM Free Air Delivery.
** Not Included. Must be purchased separately



AR-V240R-PF

Climate Control Air Compressors

CLIMATE CONTROL SERIES - DUPLEX TANK MOUNTED

- Quiet operation.
- Heavy duty single and two stage high efficiency air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Low pump rpm for less oil carryover, longevity and durability
- Flywheels designed for excellent pump cooling.
- All units factory set at 70-90 psi with heavy duty pressure switch.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with alternator control panel (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- All motors are rigid base constructed of heavy steel or cast iron, continuous duty, 1800rpm, ODP
- Specify voltage upon ordering. (1/2HP-3HP 115V/1PH, 1/2HP-10HP 230V/1PH) (1/2HP-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer’s warranty.
- For applications such as climate control, laboratories and dental clinics
- Factory mounted options available:
 - Low oil shutdown
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Mounted and wired Alternator Control Panel with CSA approval.
- Specialty units and voltages available upon request.



Climate Control Air Compressors

CLIMATE CONTROL SERIES - DUPLEX TANK MOUNTED

Specifications - Horizontal Tank Mounted Units

MODEL	HP	MOTOR RPM	CFM (FAD)* 90 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
CC-DX-0530	1/2 X 2	1725	2.4 X 2	125	30	PK-50	V-2	1	509	1/2"	349	52	20	34
CC-DX-0560	1/2 X 2	1725	2.4 X 2	125	60	PK-50	V-2	1	509	3/4"	427	61	21	40
CC-DX-07530	3/4 X 2	1725	3.4 X 2	125	30	PK-50	V-2	1	694	1/2"	357	52	20	34
CC-DX-07560	3/4 X 2	1725	3.4 X 2	125	60	PK-50	V-2	1	694	3/4"	435	61	21	40
CC-DX-07580	3/4 X 2	1725	3.4 X 2	125	80	PK-50	V-2	1	694	3/4"	488	78	21	41
CC-DX-0130	1 X 2	1725	4.5 X 2	125	30	PK-50	V-2	1	942	1/2"	403	52	20	34
CC-DX-0160	1 X 2	1725	4.5 X 2	125	60	PK-50	V-2	1	942	3/4"	481	61	21	40
CC-DX-0180	1 X 2	1725	4.5 X 2	125	80	PK-50	V-2	1	942	3/4"	534	78	21	41
CC-DX-01530	1.5 X 2	1725	6.7 X 2	125	30	CK-40	V-3	1	420	1/2"	423	52	20	38
CC-DX-01560	1.5 X 2	1725	6.7 X 2	125	60	CK-40	V-3	1	420	3/4"	501	61	21	43
CC-DX-01580	1.5 X 2	1725	6.7 X 2	125	80	CK-40	V-3	1	420	3/4"	554	78	22	44
CC-DX-0230	2 X 2	1725	9.2 X 2	125	30	CK-40	V-3	1	544	1/2"	423	52	20	38
CC-DX-0260	2 X 2	1725	9.2 X 2	125	60	CK-40	V-3	1	544	3/4"	501	61	21	45
CC-DX-0280	2 X 2	1725	9.2 X 2	125	80	CK-40	V-3	1	544	3/4"	554	78	22	44
CC-DX-0380	3 X 2	1725	13 X 2	125	80	CT-50	V-2	2	686	3/4"	780	78	22	48
CC-DX-03120	3 X 2	1725	13 X 2	125	120	CT-50	V-2	2	686	3/4"	893	88	27	56
CC-DX-50120	5 X 2	1725	20 X 2	125	120	TK-100	V-3	2	571	3/4"	1227	88	27	54
CC-DX-75120	7.5 X 2	1725	28.5 X 2	125	120	TK-100	V-3	2	630	3/4"	1325	88	27	54
CC-DX-75240	7.5 X 2	1725	28.5 X 2	125	240	TK-100	V-3	2	630	1"	1640	102	30	61
CC-DX-100120	10 X 2	1725	36.1 X 2	125	120	TK-100	V-3	2	845	3/4"	1463	88	27	54
CC-DX-100240	10 X 2	1725	36.1 X 2	125	240	TK-100	V-3	2	845	1"	1778	102	30	61
CC-DX-150240	15 X 2	1725	53.1 X 2	125	240	TK-150	V-3	2	730	1"	2396	110	30	64

Specifications and data subject to change.
*Notes: CFM (FAD) = CFM Free Air Delivery.





Compressed Air Accessories

Aluminum Air Piping

Ball Valves

Check Valves

Compressed Air Filters

Compressor Oil

Compressor Pumps

Desiccant Air Dryers

Electric Motors

Electronic Auto Drains

Filter Elements

Filter - Regulators - Lubricators

Flex Hose Connectors

Gauges

Magnetic Starters

Oil Monitors

Oil/Water Separators

Pilot Valves

Pneumatic Auto Drains

Pressure Switches

Refrigerated Air Dryers

Remote Air Receivers

Safety Valves

Service Parts

Throttle Controls

Vibration Isolators

Water Separators

2 year limited warranty

OMEGA

COMPRESSORS

Distributed by:

63 Morrow Rd.
Barrie, ON Canada L4N 3V7
Tel: 800-668-8448 or (705) 721-9500
Fax: (705) 721-8646
Email: info@omegacompressors.com
www.omegacompressors.com

OMEGA COMPRESSORS

Heavy Duty Industrial Air Compressors



For us, it's not just business. It's personal.

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - VERTICAL TANK MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5080V



TK-150120V

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	MODEL	PUMP			AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
							CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TE-5060V	5	3450	15.4	175	60	TE-50	V-3	2	1300	3/4"	375	31	22	67
TE-5080V	5	3450	15.4	175	80	TE-50	V-3	2	1300	3/4"	466	34	25	65
TK-5060V	5	1725	19.0	175	60	TK-50	V-3	2	960	3/4"	490	34	22	72
TK-5080V	5	1725	19.0	175	80	TK-50	V-3	2	960	3/4"	586	34	25	70
TK-50120V	5	1725	19.0	175	120	TK-50	V-3	2	960	3/4"	749	42	30	76
TK-7580V	7.5	1725	27.5	175	80	TK-100	V-3	2	630	3/4"	760	39	25	73
TK-75120V	7.5	1725	27.5	175	120	TK-100	V-3	2	630	3/4"	834	42	30	79
TK-10080V	10	1725	35.3	175	80	TK-100	V-3	2	845	3/4"	829	39	25	73
TK-100120V	10	1725	35.3	175	120	TK-100	V-3	2	845	3/4"	992	42	30	79
TK-150120V	15	1725	52.0	175	120	TK-150	V-3	2	730	3/4"	1301	50	34	83
TK-200120V	20	1725	68.8	175	120	TK-150	V-3	2	920	3/4"	1572	50	34	83

OMEGA
COMPRESSORS

Specifications and data subject to change.

**Notes: CFM (FAD) = CFM Free Air Delivery

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - HORIZONTAL TANK MOUNTED



TK-100120

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TE-5060	5	3450	15.4	175	60	TE-50	V-3	2	1300	3/4"	379	60	22	41
TE-5080	5	3450	15.4	175	80	TE-50	V-3	2	1300	3/4"	470	69	22	41
TK-5060	5	1725	19.0	175	60	TK-50	V-3	2	960	3/4"	494	60	22	45
TK-5080	5	1725	19.0	175	80	TK-50	V-3	2	960	3/4"	547	69	22	45
TK-50120	5	1725	19.0	175	120	TK-50	V-3	2	960	3/4"	660	75	27	49
TK-7580	7.5	1725	27.5	175	80	TK-100	V-3	2	630	3/4"	721	69	22	51
TK-75120	7.5	1725	27.5	175	120	TK-100	V-3	2	630	3/4"	923	75	27	53
TK-10080	10	1725	35.3	175	80	TK-100	V-3	2	845	3/4"	790	69	22	51
TK-100120	10	1725	35.3	175	120	TK-100	V-3	2	845	3/4"	903	75	27	53
TK-100240	10	1725	35.3	175	240	TK-100	V-3	2	845	1"	1218	93	33	59
TK-150120	15	1725	52.0	175	120	TK-150	V-3	2	730	3/4"	1212	75	27	57
TK-150240	15	1725	52.0	175	240	TK-150	V-3	2	730	1"	1527	93	33	63
TK-200120	20	1725	68.8	175	120	TK-150	V-3	2	920	3/4"	1257	75	27	57
TK-200240	20	1725	68.8	175	240	TK-150	V-3	2	920	1"	1572	93	33	63
TK-250240*	25	1770	100.0	175	240	TUK-300	V-4	2	720	1"	1882	93	33	63
TK-300240*	30	1770	115.0	175	240	TUK-300	V-4	2	850	1"	1934	93	33	63

Specifications and data subject to change.

*Notes: TK-250240 and TK-300240 already equipped with start-stop/continuous run option as standard.

**Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - BASE MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units equipped with liquid filled gauge, snubber and flex hose.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter
c/w 24 volt step down transformer.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5000



AR-V240R***

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED*** Air Receiver
											LENGTH	WIDTH	HEIGHT	
TE-5000	5	3450	15.4	175	TE-50	V-3	2	1300	1/2"	227	33	20	22	AR-V60R-PF
TK-5000	5	1725	19.0	175	TK-50	V-3	2	960	3/4"	342	35	20	26.5	AR-V80R-PF
TK-7500	7.5	1725	27.5	175	TK-100	V-3	2	630	1"	516	49	26	30	AR-V80R-PF
TK-100000	10	1725	35.3	175	TK-100	V-3	2	845	1"	585	49	26	30	AR-V120R-PF
TK-150000	15	1725	52.0	175	TK-150	V-3	2	730	1-1/2"	919	54	30	34	AR-V120R-PF
TK-200000	20	1725	68.8	175	TK-150	V-3	2	920	1-1/2"	964	54	30	34	AR-V120R-PF
TK-250000*	25	1770	100.0	175	TUK-300	V-4	2	720	2"	1274	64	36	38	AR-V240R-PF
TK-300000*	30	1770	115.0	175	TUK-300	V-4	2	850	2"	1326	64	36	38	AR-V240R-PF

Specifications and data subject to change.

*Notes: TK-250000 and TK-300000 already equipped with start-stop/continuous run option as standard.

**Notes: CFM (FAD) = CFM Free Air Delivery.

***Not included. Must be purchased separately.

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - DUPLEX

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200psi and CRN approved for Canada.
- All units set up for lead lag operation unless otherwise specified.
- All units may be ordered with alternator control panel (Alternator control panel supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown for each pump.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercoolers.
- Specialty units and voltages available upon request.



TK-DX-50120

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TK-DX-5080	5 X 2	1725	19.0 X 2	175	80	TK-50	V-3	2	960	3/4"	864	75	22	46
TK-DX-50120	5 X 2	1725	19.0 X 2	175	120	TK-50	V-3	2	960	3/4"	977	82	26.5	50
TK-DX-75120	7.5 X 2	1725	27.5 X 2	175	120	TK-100	V-3	2	630	3/4"	1325	82	26.5	53.5
TK-DX-75240	7.5 X 2	1725	27.5 X 2	175	240	TK-100	V-3	2	630	1"	1640	102	30	60
TK-DX-100120	10 X 2	1725	35.3 X 2	175	120	TK-100	V-3	2	845	3/4"	1463	82	26.5	53.5
TK-DX-100240	10 X 2	1725	35.3 X 2	175	240	TK-100	V-3	2	845	1"	1778	102	30	60
TK-DX-150240	15 X 2	1725	52.0 X 2	175	240	TK-150	V-3	2	730	1"	2396	102	30	64
TK-DX-200240	20 X 2	1725	68.8 X 2	175	240	TK-150	V-3	2	920	1"	2486	102	30	64

Specifications and data subject to change.

**Notes: CFM (FAD) = CFM Free Air Delivery.

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY - GAS SERIES

- Heavy duty single and two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All pumps equipped with head unloaders.
- All units are equipped with Honda gas engines with low oil alert.
- 11HP, 13HP and 20HP Honda Engines equipped with electric start as standard.
- TUK-2030GEC and TUK-2000GEC units equipped with a centrifugal clutch as standard.
- All single stage units are factory set at 90-125psi. All two stage units are factory set at 140-175psi.
- All tank mounted units are on air receivers rated at 200 psi and CRN approved for Canada.
- All units supplied with necessary compressor oil for start up.
- All tank mounted units supplied with extended drain valve for air receiver for ease of draining condensation.
- All base mounted units equipped with liquid filled gauge, snubber and flex hose.
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Centrifugal clutch option available for 11HP and 13HP.



TUK-1130GE



TUK-1330GE

Specifications - Tank Mounted Units

MODEL	HP	CFM (FAD)** 125 PSI	MAX PSI	TANK SIZE	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
											LENGTH	WIDTH	HEIGHT
PUK-5530G	5.5	10.5	125	30	PUK-60	V-2	1	1100	1/2"	270	46	20	35
PUK-9030G	9	17.6	125	30	PUK-65	V-3	1	1100	1/2"	305	46	20	39

MODEL	HP	CFM (FAD)** 175 PSI	MAX PSI	TANK SIZE	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
											LENGTH	WIDTH	HEIGHT
TUK-1130GE	11	19.0	175	30	TUK-50	V-3	2	960	1/2"	440	46	20	39
TUK-1330GE	13	27.5	175	30	TUK-100	V-3	2	630	1/2"	570	46	20	44.5
TUK-2030GEC*	20	35.3	175	30	TUK-100	V-3	2	845	1/2"	600	48	24	44.5

Specifications - Base Mounted Units

MODEL	HP	CFM (FAD)** 125 PSI	MAX PSI	TANK SIZE	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
											LENGTH	WIDTH	HEIGHT
PUK-5500G	5.5	10.5	125	N/A	PUK-60	V-2	1	1100	1/2"	170	30	17.25	30
PUK-9000G	9	17.6	125	N/A	PUK65	V-3	1	1100	1/2"	205	35	19	26.5

MODEL	HP	CFM (FAD)** 175 PSI	MAX PSI	TANK SIZE	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
											LENGTH	WIDTH	HEIGHT
TUK-1100GE	11	19.0	175	N/A	TUK-50	V-3	2	960	1/2"	390	35	19	26.5
TUK-1300GE	13	27.5	175	N/A	TUK-100	V-3	2	630	3/4"	470	49	26	30
TUK-2000GEC*	20	35.3	175	N/A	TUK-100	V-3	2	845	3/4"	500	51	30	44.5

Specifications and data subject to change.

*Notes: TUK-2030GEC and TUK-2000GEC already equipped with centrifugal clutch.

**Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors



NCSE-75-50 CLOSED



NCSE-75-50 OPEN



AR-V240R*

HEAVY DUTY - SILENT SERIES

- Compressor enclosed soundproof cabinet for quiet operation.
- Constant air movement by cooling fan(s) over pump and to dissipate heat from cabinet.
- Each outfit is CSA approved.
- Each outfit equipped with control panel mounted and wired.
- Each outfit equipped with hour meter and low oil shutdown. (Low oil shutdown not available on NCSE-20 and NCSE-30 series)
- Heavy duty single stage cast iron high efficient compressor pumps on all models from NCSE-20 to NCSE-50 series.
- Heavy duty two stage cast iron high efficient compressor pumps on all models from NCSE-60 to NCSE-150 series.
- Durable cast iron pumps for performance and durability.
- Splash type lubrication.
- All pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All models from NCSE-20 to NCSE-50 factory set at 70 - 90psi.
- All models from NCSE-60 to NCSE-150 factory set at 120 - 150psi.
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.
(1/2-3HP 115V/1PH) (1/2-10HP 230V/1PH)
(5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For all automotive, industrial applications including climate control, laboratories and dental clinics.

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 90 PSI	MAX PSI	NOISE LEVEL (dba)	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED* AIR RECEIVER
NCSE-20-05	1/2	1725	2.4	125	62	PK-50	V-2	1	509	1/2"	250	24	24	40	AR-V30R-PF
NCSE-20-075	3/4	1725	3.4	125	65	PK-50	V-2	1	694	1/2"	255	24	24	40	AR-V30R-PF
NCSE-30-01	1	1725	4.1	125	62	PK-60	V-2	1	525	1/2"	270	24	24	40	AR-V30R-PF
NCSE-50-015	1.5	1770	6.7	125	62	CK-40	V-3	1	420	1/2"	350	24	24	40	AR-V60R-PF
NCSE-50-02	2	1770	9.2	125	65	CK-40	V-3	1	544	1/2"	350	24	24	40	AR-V60R-PF


MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	NOISE LEVEL (dba)	MODEL	PUMP CYLINDER	STAGE	RPM	AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED* AIR RECEIVER
NCSE-60-03	3	1725	13.0	175	65	CT-50	V-2	2	686	3/4"	480	30	29	43	AR-V60R-PF
NCSE-75-50	5	1725	19.0	175	68	TK-50	V-3	2	960	3/4"	550	30	29	43	AR-V80R-PF
NCSE-100-75	7.5	1725	27.5	175	68	TK-100	V-3	2	630	1"	800	36	31	51	AR-V80R-PF
NCSE-100-10	10	1770	35.3	175	70	TK-100	V-3	2	845	1"	835	36	31	51	AR-V120R-PF
NCSE-150-15	15	1770	52.0	175	70	TK-150	V-3	2	730	1-1/4"	1100	45	35	61	AR-V120R-PF

Specifications and data subject to change.

*Not included. Must be purchased separately.

**Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA
COMPRESSORS

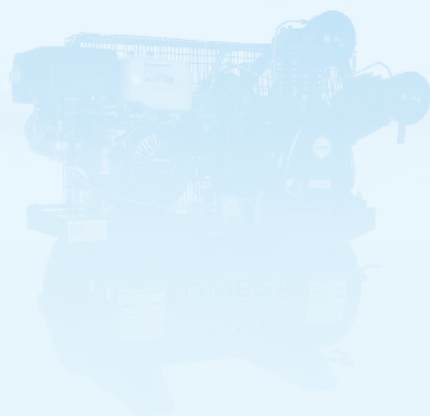

Compressed Air Accessories

Aluminum Air Piping

Ball Valves

Check Valves

Compressed Air Filters

Compressor Oil

Compressor Pumps

Desiccant Air Dryers

Electric Motors

Electronic Auto Drains

Filter Elements

Filter - Regulators - Lubricators

Flex Hose Connectors

Gauges

Magnetic Starters

Oil Monitors

Oil/Water Separators

Pilot Valves

Pneumatic Auto Drains

Pressure Switches

Refrigerated Air Dryers

Remote Air Receivers

Safety Valves

Service Parts

Throttle Controls

Vibration Isolators

Water Separators

2 year limited warranty

OMEGA

COMPRESSORS

Distributed by:

63 Morrow Rd.
Barrie, ON Canada L4N 3V7
Tel: 800-668-8448 or (705) 721-9500
Fax: (705) 721-8646
Email: info@omegacompressors.com
www.omegacompressors.com